

ANCOR



MARINE
EMERGENCY VEHICLE
INDUSTRIAL
RV

2022



Your most trusted partner

Whether on water or on the road, delivering an optimal user experience is at the heart of ASG's business. It's why we are proud to be the world's leading supplier of products and integrated systems to the marine, RV, and Specialty Vehicle industries. Our broad portfolio of market leading brands in power management, digital control & monitoring, and networked devices are distributed globally to a diverse aftermarket and OEM customer base. ASG is driven, every day, to be the world's most trusted partner to the marine and mobile industries.



Wire
Wire Management
ancorproducts.com



Lighting
Marine Accessories
Water and Fuel Systems
attwoodmarine.com



Battery Management
Power Distribution
bepmarine.com



Battery Management
Circuit Protection
Power Distribution
blueseasystems.com



Digital Control
& Monitoring
Onboard
Offboard UX
czone.net



Metal Fabricated
Hardware
garellick.com



Trolling Motors
motorguide.com



Battery Chargers
promariner.com



Heating Systems
Pumps
whalepumps.com




AC Shore Power
Marine Accessories
marinco.com



Batteries
Power Conversion
mastervolt.us



Actuators
Trim Tab System
lencomarine.com

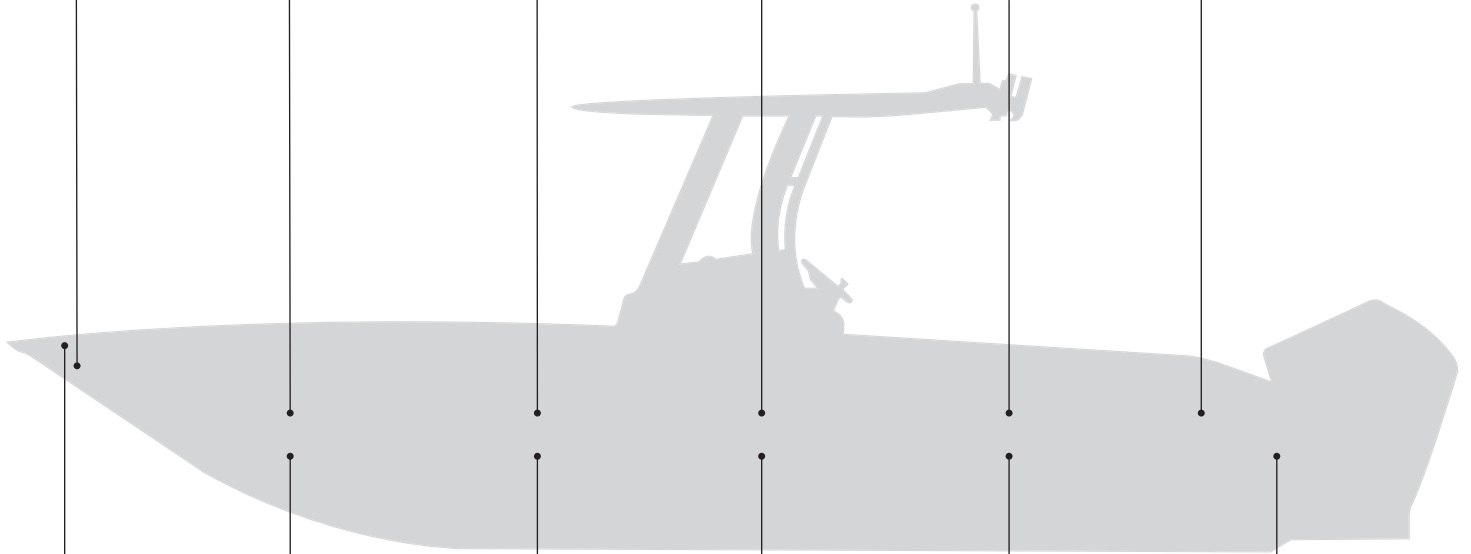



What makes Ancor different:

| Founder's Vision

For over 40 years Ancor has been the industry leader for quality tinned copper Marine Grade® wire and cable. Ancor's comprehensive product line includes everything required to complete a wiring project. This includes Marine Grade® wire and cable, terminals and connectors, wire management products, and hand tools. Ancor designs products to the highest standards that meet UL, ABYC, NMMA and USCG standards.

| Selection

Over 1,500 electrical products are designed to work together as a system

| Fast Delivery

Products stocked in multiple global locations ensures rapid order fulfillment

| Worldwide Access to Product

A distribution network in over 45 countries provides access to products when they are needed

| Information


24-hour access to product information, selection tools, and technical articles online at ancorproducts.com

| Industry Standards

Industry involvement ensures products meet ABYC, NMMA, and Coast Guard standards

| Quality

Product quality is managed in a manner consistent with international standards

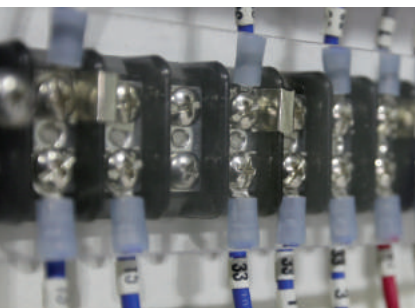

NEW Products



16

Bonded Cable

Perfect for installing trolling motor plugs.



50

RGB + Speaker Cable

Save time by only needing to run one cable when installing RGB LED lighted speakers.



30

Nylon Multi-Stack Disconnects and Flag Disconnects

Rounding out the current Ancor line of nylon terminals.



31

Heat Shrink Flag Disconnects

Also available in heat shrink for added safety and security.



NEW Products



34

Angled Battery Cable Lugs

Make your install cleaner and easier with the 90° bend instead of straining the wire and crimp connection.



53

Flag Terminal Die Sets

These die sets are needed to create the proper crimp for our new flag terminals. Works with nylon and heat shrink versions. Compatible with all Ancor ratcheting crimpers.



**EXPANDED
OFFERING**

34

Heavy-duty Butt Connectors

Adding 25 packs to meet customer requests for this popular item.



54

Pliers and Screwdrivers

Insulated pliers and screw drivers for added safety when working on an electrical project.



Table of Contents

WIRE & CABLE

Primary Wire	10
Battery Cable & Assemblies	13
Duplex Cable	14
Triplex Cable	15
Specialty Cable	16
Coax Cable & Assemblies	18
NMEA 2000 Cables & Connectors	20



p. 10



p. 13



p. 15



p. 17



p. 18



p. 20

TERMINALS & LUGS

Adhesive Lined	26
Heat Shrink Terminals	26
Nylon Insulated Terminals	29
Vinyl Insulated Terminals	31
Coax Cable Fittings	32
Tinned Copper Lugs	33
Battery Terminals & Boots	35



p. 26



p. 27




p. 28



p. 29



p. 31



p. 31



p. 31



p. 32



p. 33



p. 34



p. 35



p. 35

WIRE MANAGEMENT

Adhesive Lined	38
Heat Shrink Tubing	38
Adhesive Lined Heavy Wall	39
Heat Shrink Tubing	39
Repair Tape	40
Electrical Tape	40
Cable Ties	41
Cable Clamps	45
Wire Seals	46
Grommets	46
Split Loom & Spiral Wrap	46
Wire Management Kits	47



p. 38



p. 39



p. 40



p. 40



p. 41



p. 42



p. 43



p. 45



p. 46



p. 46



p. 47

Table of Contents


TOOLS & TESTERS

Cut/Strip/Crimp Tools	50
Crimpers	52
Mini Fish Tape	53
Tool Kits	55
Heat Tools	54
Pliers & Screwdrivers	55
Digital Multimeters	56
Snap-Around Meters	57




LIGHTING

Incandescent Bulbs	60
Miniature Halogen Bulbs	61
Festoon Bulbs	61
Medium Screw Base Bulbs	62
Fluorescent Tubes	62

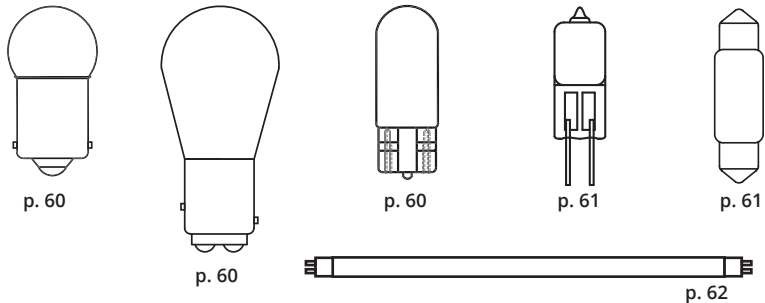

DISPLAYS

Display Racks	66
NMEA 2000	
Planogram Assortment	68

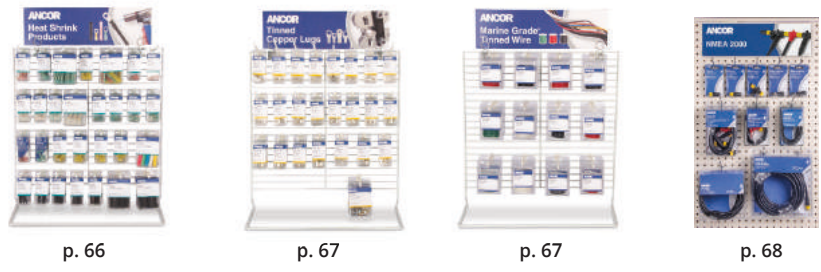

APPENDIX & INDEX

Technical Data	77
Part Number Index	82

WIRE & CABLE

Primary Wire



10

Manufactured from tinned copper stranding for maximum protection against corrosion and electrolysis. Ultra flexible (Type 3) stranding resists fatigue due to vibration and flexing.

Battery Cable & Assemblies



12

Premium, fine stranded UL1426 tinned copper battery cable for maximum conductivity and flexibility. All assemblies come with tinned copper lugs to avoid corrosion and extend life.

Multiconductor Cables



14

Duplex and triplex wire in a variety of gauge and spool sizes; including UL 1426 tinned duplex boat cable in flat and round configurations.

Specialty Cable



16

Ancor offers a broad range of cable for specialty applications to meet all of your marine and mobile wiring needs.



WIRE & CABLE

Coax Cable & Assemblies



18

Premium tinned copper features signal loss ratios of up to 50% less than other coaxial cables. All assemblies come with Ancor adhesive lined heat shrink to seal out moisture, provide strain relief and fight corrosion.

Trailer Cable & Assemblies



19

Made from our standard Ancor primary wire made specifically for trailer wiring. Assemblies with molded connectors for a wide range of applications.

NMEA 2000 Cables & Connectors



20

Ancor now carries NMEA 2000 cables and connectors for creating or expanding an NMEA 2000 network quickly and easily. Couplers are color coded to make identifying the power cable or connector easy. Premium quality. Universal fit.



Wire and cable are the backbone of every electrical system and properly selected wire will ensure a safe and reliable system.

Ancor Marine Grade® Wire & Cable

- Ancor Marine Grade® wire and cable is manufactured from tinned copper stranding for maximum protection against corrosion and electrolysis. Ultra flexible (Type 3) stranding resists fatigue due to vibration and flexing.
- Ancor's proprietary premium vinyl insulation stays flexible even in extreme cold (-40°F / -40°C) and resists salt water, battery acid, oil, gasoline and ultra-violet radiation. Exclusive insulation is rated at 600 volts, 221°F / 105°C dry and 167°F / 75°C wet, and is resistant to heat and abrasion.
- Exceeds all UL 1426, US Coast Guard Charter boat (CFR Title 46) and ABYC standards.
- See pages 69–73 for ABYC wiring guidelines and technical data.

Primary Wire 18–14 AWG

18 AWG (0.8 mm²)

Color	Ft	Part #
Black	35	180003
	100	100010
	250	100025
	500	100050
	1000	100099
Red	35	180803
	100	100810
	250	100825
	500	100850
	1000	100899
Yellow	35	181003
	100	101010
	250	101025
	500	101050
	1000	101099
Green	35	180303
	100	100310
	250	100325
	500	100350
	1000	100399
White	35	180903
	100	100910
	250	100925
	500	100950
	1000	100999
Dk Blue	35	180103
	100	100110
	250	100125
	500	100150
	1000	100199
Brown	35	180203
	100	100210
	250	100225
	500	100250A
	1000	100299
Orange	35	180503
	100	100510
	250	100525
	500	100550
	1000	100599
Pink	35	180603
	100	100610
	250	100625
	500	100650
	1000	100699

18 AWG (0.8 mm²)

Color	Ft	Part #
Purple	35	180703
	100	100710
	250	100725
	500	100750
	1000	100799
Grey	35	180403
	100	100410
	250	100425
	500	100450
	1000	100499

16 AWG (1 mm²)

Color	Ft	Part #
Black	25	182003
	100	102010
	250	102025
	500	102050
Red	1000	102099
	25	182803
	100	102810
	250	102825
Yellow	500	102850
	1000	102899
	25	183003
	100	103010
Green	250	103025
	500	103050
	1000	103099
	25	182303
White	100	102310
	250	102325AA
	500	102350
	1000	102399
Dk Blue	25	182903
	100	102910
	250	102925
	500	102950
Brown	1000	102999
	25	182103
	100	102110
	250	102125
Orange	500	102150
	1000	102199
	25	182103
	100	102110
Pink	250	102125
	500	102150
	1000	102199
	25	182103

16 AWG (1 mm²)

Color	Ft	Part #
Brown	25	182203
	100	102210
	250	102225
	500	102250
	1000	102299
Orange	25	182503
	100	102510
	250	102525
	500	102550
	1000	102599
Pink	25	182603
	100	102610
	250	102625
	500	102650
	1000	102699
Purple	25	182703
	100	102710
	250	102725
	500	102750
	1000	102799
Grey	25	182403
	100	102410
	250	102425
	500	102450
	1000	102499
Tan	100	101810
	250	101825
	500	101850
	100	101910
	250	101925
Lt Blue	500	101950

14 AWG (2 mm²)

Color	Ft	Part #
Black	18	184003
	100	104010
	250	104025
	500	104050
	1000	104099
Red	18	184803
	100	104810
	250	104825
	500	104850
	1000	104899

14 AWG (2 mm²)

Color	Ft	Part #
Yellow	18	185003
	100	105010
	250	105025
	500	105050
	1000	105099
Green	18	184303
	100	104310
	250	104325
	500	104350
	1000	104399
White	18	184903
	100	104910
	250	104925
	500	104950
	1000	104999
Dk Blue	18	184103
	100	104110
	250	104125
	500	104150
	1000	104199
Brown	18	184203
	100	104210
	250	104225
	500	104250
	1000	104299
Orange	18	184503
	100	104510
	250	104525
	500	104550
	1000	104599
Pink	18	184603
	100	104610
	250	104625
	500	104650
	1000	104699
Purple	18	184703
	100	104710
	250	104725
	500	104750
	1000	104799
Grey	18	184403
	100	104410
	250	104425
	500	104450
	1000	104499
Tan	100	103810
	250	103825
	500	103850
	100	103910
	250	103925
Lt Blue	500	103950



Primary Wire 12–6 AWG

12 AWG (3 mm²)			10 AWG (5 mm²)			8 AWG (8 mm²)			6 AWG (13 mm²)																																	
Color	Ft	Part #	Color	Ft	Part #	Color	Ft	Part #	Color	Ft	Part #																															
Black	12	186003	Black	8	188003	Black	25	111002	Black	25	112002																															
	25	106002		25	108002		50	111005		50	112005																															
	100	106010		100	108010		100	111010		100	112010																															
	250	106025		250	108025		250	111025		250	112025																															
	400	106040		500	108050		500	111050		500	112050																															
	1000	106099		1000	108099		1000	111099		750	112075																															
Red	12	186803	Red	8	188803	Red	25	111502	Red	25	112502																															
	25	106802		25	108802		50	111505		50	112505																															
	100	106810		100	108810		100	111510		100	112510																															
	250	106825		250	108825		250	111525		250	112525																															
	400	106840		500	108850		500	111550		500	112550																															
	1000	106899		1000	108899		1000	111599		750	112575																															
Yellow	12	187003	Yellow	25	109002	Yellow	25	111902	Yellow	25	112902																															
	25	107002		100	109010		50	111905		50	112905																															
	100	107010		250	109025		100	111910		100	112910																															
	250	107025		500	109050		250	111925		250	112925																															
	400	107040		1000	109099		500	111950		500	112950																															
	1000	107099		25	108302		1000	111999		750	112975																															
Green	12	186303	Green	100	108310	Green	25	111302	Green	25	112302																															
	25	106302		250	108325		50	111305		50	112305																															
	100	106310		500	108350		100	111310		100	112310																															
	250	106325		1000	108399		250	111325		250	112325																															
	400	106340		25	108902		500	111350		500	112350																															
	1000	106399		100	108910		1000	111399		750	112375																															
White	12	186903	White	250	108925	White	25	111702	White	25	112702																															
	25	106902		500	108950		50	111705		50	112705																															
	100	106910		1000	108999		100	111710		100	112710																															
	250	106925		25	108102		250	111725		250	112725																															
	400	106940		100	108110		500	111750		500	112750																															
	1000	106999		250	108125		1000	111799		750	112775																															
Dk Blue	25	106102	Dk Blue	500	108150	Dk Blue	25	111702	Dk Blue	25	112702																															
	100	106110		1000	108199		50	111705		50	112705																															
	250	106125		25	108202		100	111710		100	112710																															
	400	106140		100	108210		250	111725		250	112725																															
	1000	106199		250	108225		500	111750		500	112750																															
	Brown	25		106202	Brown		500	108250		Brown	1000	111799	Brown	750	112775																											
100		106210	1000	108299		25	108502	25	106202																																	
250		106225	25	108502		100	108510	100	106210																																	
400		106240	250	108525		250	108525	250	106225																																	
1000		106299	500	108550		500	108550	400	106240																																	
Orange		25	106502	Orange		1000	108599	Orange	1000		108599	Orange		1000	106599																											
	100	106510	25		108502	25	108502		25	106502																																
	250	106525	100		108510	100	108510		100	106510																																
	400	106540	250		108525	250	108525		250	106525																																
	1000	106599	500		108550	500	108550		400	106540																																
	Pink	25	106602		Grey	1000	108499		Grey	1000	108499		Grey	1000	106602																											
100		106610	25	109302		25	109302	25		106610																																
250		106625	100	109310		100	109310	100		106625																																
400		106640	250	109325		250	109325	250		106640																																
Purple		25	106702	Green w/ Yellow Stripe		500	109350	Green w/ Yellow Stripe		500	109350	Green w/ Yellow Stripe		500	109350																											
		100	106710			1000	109399			1000	109399			1000	109399																											
	250	106725	Purple		25	106702	Purple		25	106702	Purple		25	106702																												
	400	106740			100	106710			100	106710			100	106710																												
	Grey	1000			106499	250			106725	250			106725	250	106725	Grey	1000	106499																								
		100			105810	400			106740	400			106740	400	106740		Tan	100	105810																							
250		105825		1000	106499	1000		106499	1000	106499		Tan	250	105825																												
400		105840		25	105810	25		105810	25	105810			Tan	400	105840																											
Tan		Tan	Tan	Tan	Tan	Tan	Tan	Tan	Tan	Tan	Tan																															
														Tan	Tan			Tan	Tan	Tan	Tan	Tan	Tan																			
	Tan															Tan								Tan	Tan	Tan	Tan	Tan	Tan													
																	Tan													Tan	Tan	Tan	Tan	Tan	Tan	Tan						
												Tan																									Tan	Tan	Tan	Tan	Tan	Tan
													Tan																													

TECH TIP

Wire Flexibility Explained

Wire flexibility is influenced by two major factors: wire strand size and jacket hardness.

Wire strand size has the largest impact on overall wire flexibility. As individual wire strand size decreases, wire flexibility increases. For boat cable, UL 1426 requires at least 19 individual strands for cables 16 AWG and larger. Ancor wire uses type 3 stranding which consists of individual 30 AWG (0.010") strands, regardless of the wire gauge. Ancor's 16 AWG wire consists of 26 individual strands, while the 4/0 AWG wire consists of 2,109 individual strands.

Jacket hardness is most commonly measured by durometer, with lower measurements reflecting a more flexible material. Ancor wire measures 7 points lower than competitive product (on a scale of 1-100), resulting in a more flexible product.



Battery Cable 4–4/0 AWG

4 AWG (21 mm²)

Color	Ft	Part #
Black	25	113002
	50	113005
	100	113010
	250	113025
	500	113050
Red	25	113502
	50	113505
	100	113510
	250	113525
	500	113550
Yellow	25	113902
	50	113905
	100	113910
	250	113925
	500	113950

2 AWG (34 mm²)

Color	Ft	Part #
Black	25	114002
	50	114005
	100	114010
	250	114025
	400	114040
Red	25	114502
	50	114505
	100	114510
	250	114525
	400	114540
Yellow	25	114902
	50	114905
	100	114910
	250	114925
	400	114940

1 AWG (42 mm²)

Color	Ft	Part #
Black	25	115002
	50	115005
	100	115010
	300	115030
Red	25	115502
	50	115505
	100	115510
	300	115530
Yellow	25	115902
	50	115905
	100	115910
	300	115930

1/0 AWG (53 mm²)

Color	Ft	Part #
Black	25	116002
	50	116005
	100	116010
	250	116025
Red	25	116502
	50	116505
	100	116510
	250	116525
Yellow	25	116902
	50	116905
	100	116910
	250	116925

2/0 AWG (68 mm²)

Color	Ft	Part #
Black	25	117002
	50	117005
	100	117010
	200	117020
Red	25	117502
	50	117505
	100	117510
	200	117520
Yellow	25	117902
	50	117905
	100	117910
	200	117920

4/0 AWG (107 mm²)

Color	Ft	Part #
Black	25	119002
	50	119005
	100	119010
	250	119025
Red	25	119502
	50	119505
	100	119510
	250	119525
Yellow	25	119902
	50	119905
	100	119910
	250	119925

3/0 AWG (85 mm²)

Color	Ft	Part #
Black	25	118002
	50	118005
	100	118010
	150	118015
Red	25	118502
	50	118505
	100	118510
	150	118515
Yellow	25	118902
	50	118905
	100	118910
	150	118915

Related Products



Battery
Terminals
page 35



Lugs
page 33



Heat Shrink
Tubing
page 38



Premium
Electrical Tape
page 40



Cutting &
Crimping Tools
pages 50–53

18–4/0 AWG Wire and Cable Specifications

Wire Size		Nominal O.D.	Wire Diameter	Minimum Bend Radius	Stranding No. of 30 AWG	Cir. Mil Area	Ohms per 1000'	mm²	Wt. per 1000'			
18 AWG	.08 mm²	7/64"	2.8 mm	1.0 mm	7/8"	2.3 cm	16	1600	6.48	.08	12 lbs	5.4 kg
16 AWG	1 mm²	1/8"	3.2 mm	1.5 mm	31/32"	2.5 cm	26	2600	4.00	1.31	16 lbs	7.3 kg
14 AWG	2 mm²	9/64"	3.6 mm	2.0 mm	1-3/32"	2.8 cm	41	4100	2.53	2.08	23 lbs	10.4 kg
12 AWG	3 mm²	5/32"	4.0 mm	2.6 mm	1-1/4"	3.2 cm	65	6500	1.75	3.31	31 lbs	14 kg
10 AWG	5 mm²	7/32"	5.6 mm	3.3 mm	1-29/64"	3.7 cm	105	10,500	1.00	5.26	44 lbs	20 kg
8 AWG	8 mm²	5/16"	7.9 mm	4.3 mm	2-1/32"	5.2 cm	168	16,800	0.62	8.37	86 lbs	39 kg
6 AWG	13 mm²	11/32"	8.7 mm	5.5 mm	2-35/64"	6.5 cm	266	26,600	0.40	13.30	118 lbs	53.5 kg
4 AWG	21 mm²	13/32"	10.3 mm	7.0 mm	3-3/32"	7.9 cm	420	42,000	0.24	21.15	178 lbs	81 kg
2 AWG	34 mm²	15/32"	11.9 mm	8.0 mm	3-1/2"	8.9 cm	665	66,500	0.16	33.62	277 lbs	126 kg
1 AWG	42 mm²	17/32"	13.5 mm	9.0 mm	4-9/64"	10.4 cm	836	83,690	0.13	42.38	350 lbs	159 kg
1/0 AWG	53 mm²	9/16"	14.3 mm	10.5 mm	4-1/2"	11.4 cm	1064	105,600	0.10	53.49	437 lbs	198 kg
2/0 AWG	68 mm²	5/8"	15.9 mm	12.0 mm	4-59/64"	12.4 cm	1330	133,000	0.08	67.43	549 lbs	249 kg
3/0 AWG	85 mm²	11/16"	17.5 mm	13.0 mm	5-23/64"	13.7 cm	1665	167,800	0.06	85.01	675 lbs	306 kg
4/0 AWG	107 mm²	13/16"	20.6 mm	14.0 mm	5-7/8"	15.0 cm	2109	211,600	0.05	107.20	837 lbs	380 kg



Premium Battery Cable Assemblies


UL1426 Tinned Boat Cable

- Premium, fine stranded UL 1426 tinned copper battery cable for maximum conductivity and flexibility
- Flame retardant, UV inhibited cable rated at 600V and 221°F / 105°C
- Tinned copper lugs to avoid corrosion and extend life
- 3:1 heat shrink tubing over the electrical connection to seal out moisture and provide strain relief

Color	Length		Stud Size		Part #
4 AWG (21 mm²)					
Black	18"	45.7 cm	5/16"	7.93 mm	189130
	32"	81.2 cm	5/16"	7.93 mm	189134
	48"	121.9 cm	5/16"	7.93 mm	189136
Red	18"	45.7 cm	3/8"	9.5 mm	189131
	32"	81.2 cm	3/8"	9.5 mm	189135
	48"	121.9 cm	3/8"	9.5 mm	189137

Color	Length		Stud Size		Part #
2 AWG (34 mm²)					
Black	18"	45.7 cm	5/16"	7.93 mm	189140
	32"	81.2 cm	5/16"	7.93 mm	189144
	48"	121.9 cm	5/16"	7.93 mm	189146
Red	18"	45.7 cm	3/8"	9.5 mm	189141
	32"	81.2 cm	3/8"	9.5 mm	189145
	48"	121.9 cm	3/8"	9.5 mm	189147

For continuous current draws up to:	Use battery cable assemblies
136 amps	4 AWG
178 amps	2 AWG

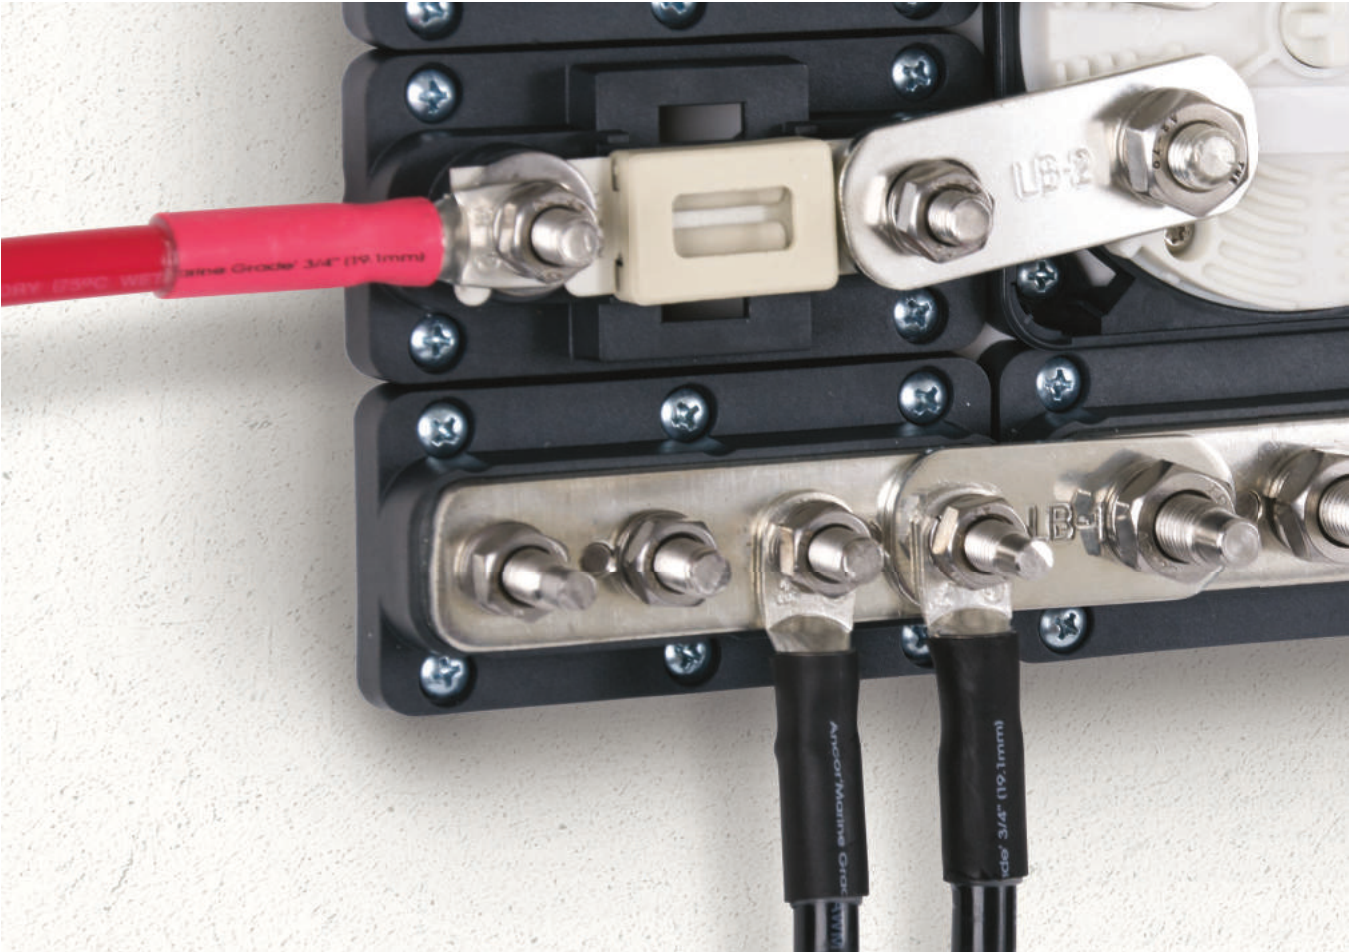

Safety Duplex Cable

UL 1426 Tinned Boat Cable

Conductor colors: red and yellow

Flat Cable



Spool Length	Part #	Nominal O.D.	Wt. per 1000'
18/2 AWG (2x0.8 mm ²)			
100'	124910		
250'	124925	3/16"x9/32"	49 lbs
500'	124950	5x7 mm	22.2 kg
1000'	124999		
16/2 AWG (2x1 mm ²)			
25'	124702		
100'	124710		
250'	124725	3/16"x5/16"	51 lbs
500'	124750	5x8 mm	23.1 kg
1000'	124799		
14/2 AWG (2x2 mm ²)			
25'	124502		
100'	124510		
250'	124525	7/32"x11/32"	65 lbs
500'	124550	6x9 mm	29.5 kg
1000'	124599		

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
12/2 AWG (2x3 mm ²)			
25'	124302		
100'	124310	7/32"x3/8"	82 lbs
250'	124325	6x10 mm	37.3 kg
500'	124350		
10/2 AWG (2x5 mm ²)			
25'	124102		
100'	124110		
250'	124125	1/4"x15/32"	128 lbs
400'	124140	6x12 mm	58.2 kg
800'	124180		
8/2 AWG (2x8 mm ²)			
50'	123905		
100'	123910	11/32"x5/8"	230 lbs
500'	123950	9x16 mm	104.5 kg
6/2 AWG (2x13 mm ²)			
50'	123705	13/32"x3/4"	364 lbs
100'	123710	10x19 mm	165.5 kg

Round Cable



Spool Length	Part #	Nominal O.D.	Wt. per 1000'
16/2 AWG (2x1 mm ²)			
100'	126710		
250'	126725	5/16"	49 lbs
500'	126750	8 mm	22.2 kg
14/2 AWG (2x2 mm ²)			
100'	126510		
250'	126525	11/32"	63 lbs
500'	126550	9 mm	28.6 kg

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
12/2 AWG (2x3 mm ²)			
100'	126310		
250'	126325	13/32"	80 lbs
500'	126350	10 mm	36.3 kg

Duplex Cable

Conductor colors: black and red

Flat Cable



Spool Length	Part #	Nominal O.D.	Wt. per 1000'
18/2 AWG (2x0.8 mm ²)			
100'	121910		
250'	121925	3/16"x9/32"	49 lbs
500'	121950	5x7 mm	22.2 kg
16/2 AWG (2x1 mm ²)			
100'	121710		
250'	121725	3/16"x5/16"	51 lbs
500'	121750	5x8 mm	23.1 kg
1000'	121799		
14/2 AWG (2x2 mm ²)			
100'	121510		
250'	121525	7/32"x11/32"	65 lbs
500'	121550	6x9 mm	29.5 kg
1000'	121599		

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
12/2 AWG (2x3 mm ²)			
100'	121310		
250'	121325	7/32"x3/8"	82 lbs
500'	121350	6x10 mm	37.3 kg
10/2 AWG (2x5 mm ²)			
100'	121110		
250'	121125	1/4"x15/32"	128 lbs
400'	121140	6x12 mm	58.2 kg
800'	121180		
8/2 AWG (2x8 mm ²)			
50'	120905		
100'	120910	11/32"x5/8"	230 lbs
250'	120925	9x16 mm	104.5 kg
6/2 AWG (2x13 mm ²)			
50'	120705	13/32"x3/4"	364 lbs
100'	120710	10x19 mm	165.5 kg

Triplex Cable

Conductor colors: black, green and white

Flat Cable



Spool Length	Part #	Nominal O.D.	Wt. per 1000'
16/3 AWG (3x1 mm ²)			
100'	131710		
250'	131725	3/16"x15/32"	75 lbs
500'	131750	5x12 mm	34 kg
1000'	131799		
14/3 AWG (3x2 mm ²)			
100'	131510		
250'	131525	7/32"x1/2"	96 lbs
500'	131550	6x13 mm	43.6 kg
900'	131590		
12/3 AWG (3x3 mm ²)			
25'	131302		
100'	131310	7/32"x17/32"	125 lbs
250'	131325	6x14 mm	56.8 kg
700'	131370		

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
10/3 AWG (3x5 mm ²)			
100'	131110		
300'	131130	1/4"x21/32"	186 lbs
500'	131150	6x17 mm	84.5 kg
8/3 AWG (3x8 mm ²)			
25'	130902		
50'	130905	3/8"x1"	287 lbs
100'	130910	10x25 mm	130.4 kg
6/3 AWG (3x13 mm ²)			
50'	130705	7/16"x1-3/16"	470 lbs
100'	130710	11x30 mm	213.6 kg

Round Cable



Spool Length	Part #	Nominal O.D.	Wt. per 1000'
12/3 AWG (3x1 mm ²)			
100'	133710	11/32"	75 lbs
250'	133725	9 mm	34 kg
14/3 AWG (3x2 mm ²)			
100'	133510		
250'	133525	13/32"	96 lbs
900'	133590	10 mm	43.6 kg

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
12/3 AWG (3x3 mm ²)			
100'	133310	7/16"	125 lbs
250'	133325	11 mm	56.8 kg

Related Products



Cutting & Stripping Tools
pages 51-53



Wire Seals
page 46

TECH TIP

Round versus Flat Duplex/Triplex

Duplex and triplex cable have many different advantages to help installers. The grouped wires save time and effort by having to run only one group instead of multiple individual wires and also provides extra protection for the wire itself. But they have different advantages based on the shape too. Round cable for instance is easier to install through bulk heads, walls, panels or holes, while flat cable is easier to route long distances since it can be moved through a smaller space.



Specialty Cable



Bonded Cable **NEW**

Tinned Copper

Color conductors: red and black

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
8/2 AWG (2x8 mm²)			
25'	121802		
100'	121810	5/8"x5/16"	172 lbs
250'	121825	15.9x7.9 mm	78.0 kg
6/2 AWG (2x13 mm²)			
25'	121602A		
100'	121610	11/16"x11/32"	236 lbs
250'	121625	17.5x8.7 mm	107.0 kg



Twisted Pairs w/ Shield

Premium Tinned Copper

Color conductors: red and black

- For all metal boats and around sensitive electronics
- 93% tinned copper shield for maximum EMI and RFI rejection
- 2-3" lay for interference cancellation

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
14/2 AWG (2x2 mm²)			
100'	141410	.330"	73.2 lbs
250'	141425	8.4 mm	33.3 kg



Flat Ribbon Bonded Cable

Premium Tinned Bonded Copper

Conductor colors: red and black

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
16/2 AWG (2x1 mm²)			
100'	153110		
250'	153125	1/8"x1/4"	32 lbs
500'	153150	3.2x6.4 mm	14.5 kg



Round Mast

UL 1426 Tinned Boat Cable

Color conductors: black, blue, green, brown and red

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
14/5 AWG (5x2 mm²)			
100'	155010	1/2"	160 lbs
500'	155050	12.7 mm	79.5 kg



Round Instrument Cable

100% Mylar Foil Shield & Drain Wire

UL 1426 Tinned Boat Cable

Color conductors: red, black and bare

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
20/3 AWG (3x0.5 mm²)			
100'	153010	7/32"	30 lbs
500'	153050	5.6 mm	13.6 kg



Round Signal

100% Mylar Foil Shield and Drain Tinned Boat Cable

Conductor colors: black, red, green, blue, brown, orange, purple and yellow

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
20/8 AWG (8x0.5 mm²)			
100'	158010	5/16"	63 lbs
250'	158025	7.9 mm	28.6 kg



Signal Cable

Tinned Boat Cable

Conductor colors: red and black

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
20/2 AWG (2x0.5 mm²)			
25'	189303		
100'	122010	5/32"x1/4"	18 lbs
250'	122025	4x6.4 mm	8.1 kg
500'	122050		



Bilge Pump Cable

Premium Tinned Copper

Color conductors: black, brown and red
Insulation: grey

- Conductors specifically for bilge pumps
- Oil resistant
- SJTOW-A water resistant jacket

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
16/3 AWG (3x1 mm²)			
100'	156610	.348"	78 lbs
250'	156625	8.85 mm	35.5 kg
14/3 AWG (3x2 mm²)			
100'	156410	.377"	99 lbs
250'	156425	9.6 mm	45.0 kg
500'	156450		



Flat Ribbon Bonded RGB Cable

Tinned Copper

Conductor colors: red, light blue, green, and white

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
18/4 AWG (4x0.08 mm²)			
100'	160010	3/32"x3/8"	48 lbs
1000'	160099	2.3x9.3 mm	21.8 kg
16/4 AWG (4x1 mm²)			
100'	160110	1/8"x15/32"	64 lbs
1000'	160199	2.6x10.5 mm	29.0 kg
14/4 AWG (4x2 mm²)			
100'	160210	7/64"x15/32"	92 lbs
1000'	160299	3.0x11.9 mm	41.7 kg



Super Flex Audio Cable

Premium Tinned Copper

- Super flexible, easy to run
- Clear jacket to blend into the environment
- Drawn copper, unidirectional lay for ultimate in sound quality
- Tinned copper for corrosion resistance in the marine environment

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
18/2 AWG (2x0.8 mm²)			
100'	142810	.265"	29 lbs
		6.7 mm	13 kg
16/2 AWG (2x1 mm²)			
100'	142610	.319"	51 lbs
250'	142625	8.1 mm	23.1 kg
500'	142650		
14/2 AWG (2x2 mm²)			
100'	142410	.345"	65 lbs
250'	142425	8.8 mm	29.5 kg
1000'	142499		



RGB + Speaker Cable **NEW**

Tinned Copper

18 AWG conductors for RGB lighting: yellow, red, blue, green

16 AWG conductors for speaker connections: black and red

- Saves time by running only one cable
- Meets ABYC standards

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
18/4 AWG (4x0.08 mm²) + 16/2 AWG (2x1 mm²)			
25'	170002		
100'	170010	.352"	69.9 lbs
250'	170025	8.9 mm	31.7 kg




GTO 15 High Voltage Cable (15000V)

Color conductors: white

- Coupler output to antenna

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
14 AWG (2 mm²)			
25'	150102	1/4"	38 lbs
100'	150110	6.4 mm	17.2 kg





Shore Power Cord

Conductor colors: black, white, green (and red 100319 only)

- High visibility yellow jacket is weather and sunlight resistant
- Ultra flexible insulation is abrasion resistant for "hard service" applications
- 600 volt rated for extra heavy-duty service
- 16/3 is 300 volt cable
- Temp rating: 140°F / 60°C

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
10/3 STOW			
100'	153710	21/32"	284 lbs
250'	153725	17 mm	129 kg
10/3 STW			
250'	SPC103	21/32"	284 lbs
		17 mm	129 kg

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
6/3 STW			
per/ft**	100320F	31/32"	540 lbs
		24.4 mm	254.4 kg
6/4 STW			
per/ft**	100319F	1-5/64"	695 lbs
		27.4 mm	316 kg

SPC103, 100320F and 100319F are not tinned wire

**50 ft minimum

Coaxial Cable & Assemblies

Coaxial Cable

Premium Tinned Copper

- Features signal loss ratios of up to 50% less than other coaxial cables
- Tinned copper center conductor as well as tinned copper outer braid for corrosion resistance and easy soldering
- 96% braid for best signal strength and least interference with UV inhibited white jacket for longest life

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
RG 58CU			
100'	150510	3/16"	26 lbs
250'	150525	4.8 mm	11.8 kg
RG 59U			
250'	151025	1/4"	36 lbs
500'	151050	6.4 mm	16.3 kg
RG 8X			
100'	151510		
250'	151525	1/4"	40 lbs
500'	151550	6.4 mm	18.1 kg
1000'	151560		
RG 213			
100'	151710		
250'	151725	13/32"	110 lbs
500'	151750	10.3 mm	50 kg



Related Products
Coaxial Cable Fittings
page 32



Coaxial Cable Assemblies

Premium Tinned Copper

- All assemblies come with Ancor adhesive lined heat shrink to seal out moisture, provide strain relief and fight corrosion
- 96% tinned copper braid for optimum protection against signal loss
- 100% tinned copper center conductor and braid
- No solder or special tools required
- Special low loss SAT NAV extensions



Wire Type	RG58C/U	RG59U	RG8X	RG213
Insulation Material	PVC*	PVC	PVC	PVC*
Nominal O.D.	3/16" 4.8 mm	1/4" 6.4 mm	1/4" 6.4 mm	13/32" 10.3 mm
AWG	20	23	16	13
Conductor Stranding	19/33	Solid**	19/29	7/21
Braid Coverage	96%	96%	96%	96%
Wt. per 1000'	26 lbs 11.8 kg	36 lbs 16.3 kg	40 lbs 18.1 kg	110 lbs 50 kg
Impedance (Ohms)	50	75	50	50
Capacitance/Ft.	30.8 pF	20.5 pF	26.0 pF	30.8pF
Attenuation/100'				
@50MHz	3.3db	2.4db	2.5db	1.3db
@100MHz	4.9db	3.4db	3.7db	1.9db
@1000MHz	21.5db	12.0db	13.5db	8.0db
Velocity of Propagation	66%	66%	78%	66%

* non-contaminating insulation ** copperweld

TECH TIP

Ancor Recommends

- RG 58CU for interconnecting electronic equipment
- RG 59U for TVs and some SAT NAVs
- RG 213 for VHF runs more than 50 feet
- RG 8X for VHF runs less than 50 feet

Ends Description	Wire Length	Part #
RG58CU Two ends assembled	3'	189800
RG8X One end assembled	50'	189849

Trailer Cable & Assemblies



Flat Ribbon Bonded Trailer Cable

Premium Tinned Bonded Copper

Conductor colors: brown, green, white, and yellow

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
16/4 AWG (4x1 mm²)			
100'	154510	1/8"x1/2"	29.2 lbs
250'	154525	3.2x12.7 mm	13.2 kg



Flat Trailer Cable

Tinned Boat Cable

Conductor colors: yellow, white, green, and brown

Spool Length	Part #	Nominal O.D.	Wt. per 1000'
16/4 AWG (4x1 mm²)			
100'	154010	3/16"x9/16"	105 lbs
300'	154030	4x14 mm	47.7 kg

Trailer Assemblies

- Molded trailer connectors are made with 16 gauge wire
- Color coding in accordance with SAE recommended practices
- Male Connector = Trailer Side / Female Connector = Vehicle Side
- 4-contact connectors are molded with an EasyGrip® for fast and easy disconnect
- Loops can be cut to the desired length for splicing into an existing wire assembly


2-wire



male female

length	style	part #
12"	loop	249102

4-wire



male female

length	style	part #
12"	loop	249101

NMEA 2000® Cables and Connectors

Premium Quality. Universal Fit.

Ancor NMEA 2000 approved cables and connectors simplify creating or expanding an NMEA 2000 network. Couplers are color coded to make identifying the power cable or connector easy once installed as part of an NMEA 2000 network. The color coded couplers connect to the corresponding Ancor cables and connectors creating an easy to identify network.

- NMEA 2000 Approved, 100% universal and compatible with other manufacturers' products
- NMEA micro-size



NMEA 2000 Power Cable With Tee

For power connection to an NMEA 2000 network.

The tee is color coded red to make identifying the power cable easy once installed as part of an NMEA 2000 network. The yellow couplers connect to the corresponding Ancor backbone cables and tees creating a simplified, color coded network installation.

- Includes a tee for direct connection to backbone cables
- Large 18 AWG power conductors to reduce voltage drop, provide better reliability and meet the requirements of ABYC and the USCG for minimum size power conductors

Part # 270000 3.3 ft 1 m

Ancor NMEA 2000 Color Key:

- = power connection
- = power isolation
- = backbone connection
- = inline termination
- = drop connection

Backbone vs Drop Cables



Backbone Cables:

- yellow coupler
- low loss cable

Drop Cables:

- black coupler
- slim, flexible cable



NMEA 2000 Backbone Cables

For connection to an NMEA 2000 tee connector.

The yellow couplers connect to the corresponding Ancor tees creating a simplified, color coded network installation.

- Large 18 AWG power conductors to reduce voltage drop and provide better reliability for critical backbone cables

Part # 270001 1.6 ft .5 m
 Part # 270002 6.5 ft 2 m
 Part # 270005 16 ft 5 m
 Part # 270010 32 ft 10 m



NMEA 2000 Drop Cables

For connection between an NMEA 2000 device and tee connector.

The black couplers connect to the corresponding Ancor tees creating a simplified, color coded network installation. The drop cables are smaller in diameter and more flexible than backbone cables for easy connection to NMEA 2000 devices.

- Super flexible 22 AWG power conductors for ease of installation and wire routing

Part # 270300 1.6 ft .5 m
 Part # 270301 3.3 ft 1 m
 Part # 270302 6.5 ft 2 m
 Part # 270305 16 ft 5 m



APPROVED

NMEA 2000 Tee Connectors

For connection between NMEA 2000 drop cables and backbone cables.

The yellow couplers connect to the corresponding Ancor tees and backbone cables, creating a simplified, color coded network installation. The connectors are offered in four configurations for maximum installation flexibility. The two way and four way tee connectors allow for multiple drop cables to be connected without additional backbone cable.

Part #	270101	Single Tee Connector
Part #	270103	2 Way Tee Connector
Part #	270104	4 Way Tee Connector



270101



270103



270104



APPROVED

NMEA 2000 Terminators

For proper termination of an NMEA 2000 network.

The yellow couplers connect to the corresponding Ancor tees, creating a simplified, color coded network installation. One male and one female terminator is required for each NMEA 2000 network.

Part #	270105	Female
Part #	270106	Male



270105



270106

NMEA 2000 Inline Terminator

For proper termination of a network in a single piece, space saving design.

The inline terminator connects between a backbone cable and a drop cable, while still maintaining proper termination for the end of the network.

Part #	270114
--------	--------



NMEA 2000 Blanking Caps

Cover unused couplers.

Protects unused tee connectors from dust and water. 2-pack.

Part #	270111	Female
Part #	270112	Male



270111



270112



APPROVED

NMEA 2000 90° Elbow Connector

Makes cable routing easier.

The connector is installed between two cables to reduce stress on the cables and create a compact installation.

Part #	270108
--------	--------



NMEA 2000 Field Serviceable Connectors

For termination of bare NMEA cable.

Securely terminate bulk cable, or replace a broken end.

Part #	270109	Female
Part #	270110	Male



270109



270110

NMEA 2000 Through Bulkhead Adaptor

Use for transitions through bulk heads or panels.

Simplifies installation when routing through a waterproof bulkhead or panel. Creates a connection point for removable equipment such as a computer interface.

Part #	270107
--------	--------



NMEA 2000 Power Isolator

Isolating power within a NMEA 2000 network.

The power isolator connects between NMEA 2000 tees and backbone cables while isolating the power supply within the network.

Part #	270113
--------	--------



NMEA 2000 Starter Kits



NMEA 2000 Single Device Starter Kit

Kit include all components needed to create a single device NMEA 2000 network.

Kit includes:

- (1) Power Cable with Tee, 3.3 ft (1m), part # 270000
- (1) Male Terminator, part # 270106
- (1) Female Terminator, part # 270105
- (1) Single Tee Connector, part # 270101
- (1) Drop Cable, 6.5 ft (2m), part # 270302

Part # 270201





NMEA 2000 Dual Device Starter Kit

Kit include all components needed to create a dual device NMEA 2000 network.

Kit includes:

- (1) Power Cable with Tee, 3.3 ft (1m), part # 270000
- (1) Male Terminator, part # 270106
- (1) Female Terminator, part # 270105
- (1) Dual Tee Connector, part # 270103
- (2) Drop Cable, 6.5 ft (2m), part # 270302

Part # 270202

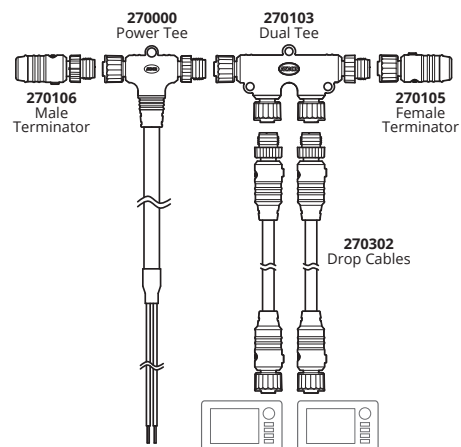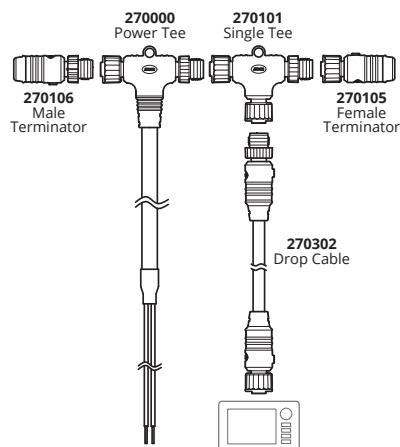




NMEA 2000 Single Device Backbone Starter Kit

Basic starter kit for adding a new NMEA 2000 network to your boat.

Kit includes:

- (1) Power Cable with Tee, 3.3 ft (1m), part # 270000
- (1) Male Terminator, part # 270106
- (1) Female Terminator, part # 270105
- (1) Single Tee Connector, part # 270101
- (1) Drop Cable, 1.64 ft (.5m), part # 270300
- (1) Backbone Cable, 16.4 ft (5m), part # 270005

Part # 270203

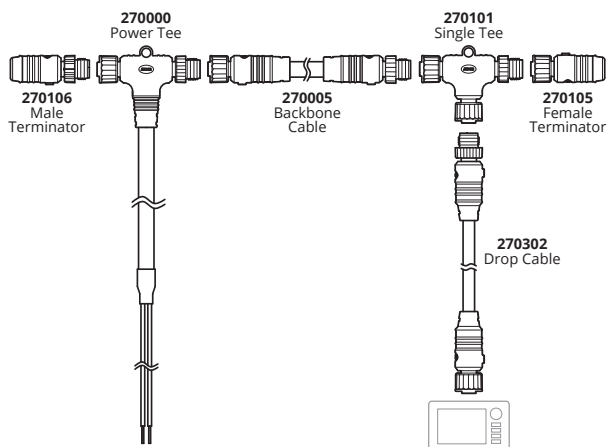

TECH TIP

Approved vs Certified

NMEA Components—cables and connectors must pass NMEA approval to guarantee that they are manufactured to standards which allow them to be universally used with any manufacturers approved components and certified devices.

NMEA Devices—must be certified to run the universal NMEA 2000 communications protocols to be used universally between different manufacturers devices.



TERMINALS & LUGS

Adhesive Lined Heat Shrink Terminals



26

Includes a heat activated adhesive built into the sleeve of the tubing for improved seal and strain relief.

Nylon Insulated Terminals



29

Marine Grade® Nylon terminals are designed for harsh boating applications. Nylon insulators are ideal for crimping and will not split.

Vinyl Insulated Terminals



31

Ideal for non-waterproof applications.



TERMINALS & LUGS

Coax Cable Fittings



32

Ancor's complete line of coax fittings allows custom cable lengths to fit any application.

Tinned Copper Lugs



33

Ancor Marine Grade® lugs are made from heavy-duty annealed tinned copper for maximum current flow and corrosion resistance.

Battery Terminals, Covers & Clips



35

Provides proper connections to batteries for maximum conductivity.



Electrical systems rely on Ancor terminals and lugs to securely connect a vessels' electrical system so current-carrying loads swiftly move from the source of power to the loads.

Adhesive Lined Heat Shrink Terminals

- Heat activated adhesive built into the sleeve of the heat shrink tubing
- Shrinks to form a water tight seal and ultimate vibration and strain relief
- Tinned for corrosion resistance
- Pure copper for maximum current flow
- Brazed seam for maximum strength
- UL listed and CSA recognized
- Shrinks at 275°F / 135°C

Heat Shrink Ring Terminals

- UL 486A

AWG	Screw Size	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	#8 4 mm	3	310203
		25	310225
		100	310299
	#10 4.8 mm	3	310303
		25	310325
		100	310399
	1/4" 6.4 mm	3	310403
		25	310425
		100	310499
	5/16" 7.9 mm	3	310503
		25	310525
		100	310599
16-14 1-2 mm ²	3/8" 9.5 mm	3	310603
		25	310625
		100	310699
	#8 4 mm	3	311203
		25	311225
		100	311299
	#10 4.8 mm	3	311303
		25	311325
		100	311399
	1/4" 6.4 mm	3	311403
		25	311425
		100	311499
	5/16" 7.9 mm	3	311503
		25	311525
		100	311599
	3/8" 9.5 mm	3	311603
		25	311625
		100	311699

AWG	Screw Size	Qty/ Pkg	Part #
12-10 3-5 mm ²	#8 4 mm	3	312203
		25	312225
		100	312299
	#10 4.8 mm	3	312303
		25	312325
		100	312399
	1/4" 6.4 mm	3	312403
		25	312425
		100	312499
	5/16" 7.9 mm	3	312503
		25	312525
		100	312599
8 8 mm ²	3/8" 9.5 mm	3	312603
		25	312625
		100	312699
	#10 4.8 mm	3	321303
		25	321325
		100	321399
	1/4" 6.4 mm	3	321403
		25	321425
		100	321499
	5/16" 7.9 mm	3	321503
		25	321525
		100	321599
	3/8" 9.5 mm	3	321603
		25	321625
	1/2" 12.7 mm	3	321703
		25	321725



Heat Shrink Snap Plugs



AWG	Gender	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	Female	3	318803
		25	318825
		100	318899
	Male	3	318903
		25	318925
		100	318999
16-14 1-2 mm ²	Female	3	319803
		25	319825
		100	319899
	Male	3	319903
		25	319925
		100	319999

Heat Shrink Spade Terminals

- UL 486A



AWG	Screw Size	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	#8 4 mm	3	313203
		25	313225
		100	313299
16-14 1-2 mm ²	#8 4 mm	3	314203
		25	314225
		100	314299
	#10 4.8 mm	3	314303
		25	314325
		100	314399
12-10 3-5 mm ²	#8 4 mm	3	315203
		25	315225
		100	315299
	#10 4.8 mm	3	315303
		25	315325
		100	315399

Related Products



Crimping Tools
pages 51-53



Heat Tools
page 54

Heat Shrink Butt Connectors

- UL 486C



AWG	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	3	309003
	25	309025
	100	309099
	500	309002
16-14 1-2 mm ²	3	309103
	25	309125
	100	309199
	500	309102
12-10 3-5 mm ²	3	309203
	25	309225
	100	309299
	500	309202
8 8 mm ²	3	309303
	25	309325
	500	309302

Heat Shrink Butt Connector Packs

- Reusable jar is clear for easy identification and has a flip lid for ease of use
- Reusable compact case (6.625"L x 3.125"W x 1.375"D) fits easily in most storage areas

AWG	Qty/ Pkg	Pkg	Part #
22-18 0.3-0.8 mm ²	250	jar	309001
16-14 1-2 mm ²	250	jar	309101
12-10 3-5 mm ²	200	jar	309201
Assorted (50) 22-18, (150) 16-14, (50) 12-10 AWG	250	jar	309000
Assorted (25) each	75	case	220011
Assorted (10) 22-18, (20) 16-14, (10) 12-10 AWG	40	clam	220012



309000



220011

Heat Shrink Step-Down/Multi-Wire Connectors


- 4:1 shrink ratio tubing to ensure a watertight seal between wires
- Flared barrel with uniform copper wall ensures an easy and proper mechanical crimp
- Crimp indicator on barrel for proper placement of installation tool
- Clear heat shrink tubing ensures crimp accuracy
- Colored stripes on the barrel indicate which crimp die to use, regardless of application

AWG	Tubing Color	Pkg Qty	Part #	Barrel End 1	Barrel End 2
24-22 0.2-0.3 mm ²	Clear tube w/ white dashes □□□□□	3	320003	(1) 24-22 AWG	(1) 22-18 AWG or (2) 24-22 AWG
		25	320025		
22-18 0.3-0.8 mm ²	Clear tube w/ red dashes ■ ■ ■ ■ ■	3	320103	(1) 22-18 AWG	(1) 16-14 AWG or (2) 22-18 AWG
		25	320125		
16-14 1-2 mm ²	Clear tube w/ blue dashes ■ ■ ■ ■ ■	3	320203	(1) 16-14 AWG	(1) 12-10 AWG or (2) 16-14 AWG
		25	320225		
12-10 3-5 mm ²	Clear tube w/ yellow dashes ■ ■ ■ ■ ■	3	320303	(1) 12-10 AWG	(1) 8 AWG or (2) 12-10 AWG
		25	320325		

Kit

AWG	Qty/ Pkg	Pkg	Part #
Assorted (5) 24-22 AWG, (10) 22-18 AWG, (10) 16-14 AWG, (5) 12-10 AWG	30	jar	320000

16-14 AWG Step-Down Connector Example

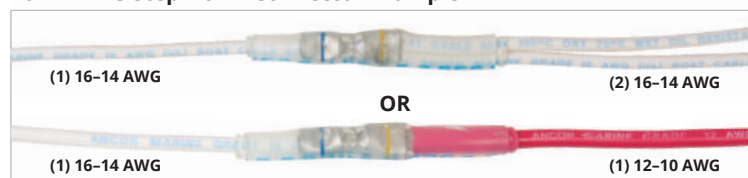

320000

Related Products


Crimping Tools
pages 51-53

Heat Tools
page 54

Heat Shrink Disconnects



AWG	Tab Size	Gender	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	.110	Female	100	326899
	.187	Female	100	336899
			3	316803
	.250	Female	25	316825
			100	316899
			3	316903
16-14 1-2 mm ²	.250	Male	25	316925
			100	316999
	.110	Female	100	327899
	.187	Female	100	337899
			3	317803
	.250	Female	25	317825
12-10 3-5 mm ²			100	317899
			3	317903
	.250	Male	25	317925
			100	317999
			3	320803
	.250	Female	25	320825
12-10 3-5 mm ²			100	320899
			3	320903
	.250	Male	25	320925
			100	320999

Heat Shrink Flag Disconnects **NEW**

- 90° angle simplifies wire routing and connections
- .250 (6.4mm) tab size



AWG	Gender	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	Female	3	356803
		25	356825
16-14 1-2 mm ²	Female	3	357803
		25	357825



SPK1614



SPK2218

Universal Speaker Connector Kits

Ancor's universal speaker connector kits include all the connectors required to install speakers regardless of manufacturer. Heat shrink disconnects provide a sealed connection for the harsh marine environment.

AWG	Qty/ Pkg	Pkg	Part #
22-18 0.3-0.8 mm ²	6	clam	SPK2218
16-14 1-2 mm ²	6	clam	SPK1614

6 pc Kits include:

- (2) .250 tab
- (2) .187 tab
- (2) .110 tab

AWG	Qty/ Pkg	Pkg	Part #
Assorted	90	case	SPKKIT

90 pc Kit includes:

- 22-18 AWG:
(10) .110 tab
(10) .187 tab
(10) .250 tab
- 16-14 AWG:
(20) .110 tab
(20) .187 tab
(20) .250 tab
- Reusable compact case



SPKKIT

Related Products



Crimping Tools
pages 51-53



Heat Tools
page 54

Marine Grade® Terminals

**EXPANDED
OFFERING**

- Ancor's Marine Grade® terminals differ from automotive terminals by being designed for the harsh marine environment
- Tinned copper gives the least electrical resistance but the most corrosion protection
- Nylon insulators are easy to crimp and will not split
- Barrels are designed to tightly grip the wire with the least effort

Nylon Ring Terminals

- Nylon insulated with insulation grip
- Double crimp, funnel entry
- UL 486A



AWG	Screw Size	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	#6 3.6 mm	6	230201
		25	210201
	#8 4 mm	6	230202
		25	210202
		100	220202
	#10 4.8 mm	6	230203
		25	210203
		100	220203
	1/4" 6.4 mm	5	230204
		25	210204
	5/16" 7.9 mm	5	230205
		25	210205
16-14 1-2 mm ²	#6 3.6 mm	6	230211
		25	210211
	#8 4 mm	6	230212
		25	210212
		100	220212
	#10 4.8 mm	6	230213
		25	210213
		100	220213
	1/4" 6.4 mm	500	222213
		5	230214
	5/16" 7.9 mm	25	210214
		100	220214
12-10 3-5 mm ²	3/8" 9.5 mm	5	230206
		25	210206
	1/2" 12.7 mm	5	230207
		25	210207
	5/8" 15.9 mm	5	230208
		25	210208
8 8 mm ²	3/4" 19.1 mm	5	230209
		25	210209
	7/8" 22.2 mm	5	230210
		25	210210
	1" 25.4 mm	5	230211
		25	210211

AWG	Screw Size	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	#6 3.6 mm	5	230221
		25	210221
	#8 4 mm	5	230222
		25	210222
		100	220222
	#10 4.8 mm	5	230223
		25	210223
		100	220223
	1/4" 6.4 mm	4	230224
		25	210224
	5/16" 7.9 mm	4	230225
		25	210225
16-14 1-2 mm ²	3/8" 9.5 mm	25	210226
		100	220226
	1/2" 12.7 mm	3	230227
		25	210227
	5/8" 15.9 mm	2	230228
		25	210228
	3/4" 19.1 mm	2	230229
		25	210229
	7/8" 22.2 mm	2	230230
		25	210230
	1" 25.4 mm	2	230231
		25	210231
12-10 3-5 mm ²	1 1/4" 31.8 mm	2	230232
		25	210232
	1 1/2" 38.1 mm	2	230233
		25	210233
	1 3/4" 44.5 mm	2	230234
		25	210234
8 8 mm ²	2" 50.8 mm	2	230235
		25	210235
	2 1/4" 63.5 mm	2	230236
		25	210236
	2 1/2" 63.5 mm	1	230237
		25	210237

AWG	Screw Size	Qty/ Pkg	Part #
6 13 mm ²	#10 4.8 mm	1	230243
		25	210243
	1/4" 6.4 mm	1	230244
		25	210244
	5/16" 7.9 mm	1	230245
		25	210245
	3/8" 9.5 mm	1	230246
		25	210246
	1/2" 12.7 mm	1	230247
		25	210247
	5/8" 15.9 mm	1	230248
		25	210248

Related Products



Crimping Tools
pages 51-53

Nylon Flanged Spades

- Nylon insulated with insulation grip
- Double crimp, funnel entry
- UL 486A



AWG	Screw Size	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	#6 3.6 mm	6	230301
		25	210301
	#8 4 mm	6	230302
		25	210302
	#10 4.8 mm	6	230303
		25	210303
16-14 1-2 mm ²	#6 3.6 mm	6	230311
		25	210311
	#8 4 mm	6	230312
		25	210312
	#10 4.8 mm	100	220312
		6	230313
12-10 3-5 mm ²	#8 4 mm	25	210313
		100	220313
	#10 4.8 mm	25	210322
		100	220322

Nylon Single Crimp Butt Connectors

- Nylon insulated seamless
- UL 486C



AWG	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	7	230100
	25	210100
	100	220100
	500	222100
16-14 1-2 mm ²	7	230110
	25	210110
	100	220110
	500	222110
12-10 3-5 mm ²	5	230120
	25	210120
	100	220120
	500	222120

Nylon Double Crimp Butt Connectors

- Nylon insulated with insulation grip
- Funnel entry
- UL 486C



AWG	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	3	230161
	25	210161
	100	220161
	500	222161
16-14 1-2 mm ²	3	230162
	25	210162
	100	220162
	500	222162
12-10 3-5 mm ²	2	230163
	25	210163
	100	220163
	500	222163

Nylon Fully Insulated Disconnects

- .250 (6.4 mm) tab size
- Nylon insulated with insulation grip
- Double crimp, funnel entry
- UL 310



AWG	Gender	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	Female	4	231408
		25	211408
		100	221408
	Male	4	231409
		25	211409
		100	221409
16-14 1-2 mm ²	Female	4	231418
		25	211418
		100	221418
	Male	4	231419
		25	211419
		100	221419
12-10 3-5 mm ²	Female	3	231428
		25	211428
		100	221428
	Male	3	231429
		25	211429
		100	221429

Nylon Disconnects

- .250 (6.4 mm) tab size
- Nylon insulated with insulation grip
- Double crimp, funnel entry
- UL 310



AWG	Gender	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	Female	4	230808
		25	210808
		100	220808
	Male	4	230809
		25	210809
		100	220809
16-14 1-2 mm ²	Female	4	230818
		25	210818
		100	220818
	Male	4	230819
		25	210819
		100	220819
12-10 3-5 mm ²	Female	3	230828
		25	210828
		100	220828
	Male	3	230829
		25	210829
		100	220829

Nylon Flag Disconnects **NEW**

- .250 (6.4 mm) tab size
- Nylon insulated with insulation grip



AWG	Gender	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	Female	NEW 4	231601
		NEW 25	211601
16-14 1-2 mm ²	Female	NEW 4	231611
		NEW 25	211611
12-10 3-5 mm ²	Female	NEW 3	231621
		NEW 25	211621

Nylon Multi-Stack Connectors

- .250 (6.4mm) tab size
- Nylon insulated with insulation grip
- Double crimp, funnel entry
- UL 310



EXPANDED OFFERING

AWG		Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	NEW	3	230602
	NEW	25	210602A
	NEW	100	220602
16-14 1-2 mm ²		3	230612
		25	210612
		100	220612
12-10 3-5 mm ²	NEW	3	230622
	NEW	25	210622
	NEW	100	220622

Nylon 3-Way Connectors

- Nylon insulated with insulation grip
- Double crimp, funnel entry



AWG	Qty/ Pkg	Part #
16-14 1-2 mm ²	1	230510
	25	210510
12-10 3-5 mm ²	1	230520
	25	210520

Nylon Snap Plugs

- Nylon insulated with insulation grip
- Double crimp, funnel entry



AWG	Gender	Qty/ Pkg	Part #
22-18 0.3-0.8 mm ²	Female	4	230709
		25	210709
	Male	4	230708
		25	210708
16-14 1-2 mm ²	Female	4	230719
		25	210719
	Male	4	230718
		25	210718
		100	220718

Vinyl Step Down Butt Connectors

- Vinyl insulated
- UL 486C



AWG	Qty/ Pkg	Part #
16-14 to 22-18 1-2 to 0.3-0.8 mm ²	3	230164
	25	210164
12-10 to 16-14 3-5 to 1-2 mm ²	3	230165
	25	210165
8 to 12-10 8 to 3-5 mm ²	3	230166
	25	210166

Vinyl Butt Connectors

- Vinyl insulated
- UL 486C



AWG	Qty/ Pkg	Part #
8 8 mm ²	2	230130
	25	210130
6 13 mm ²	1	230140
	25	210140
4 21 mm ²	1	230150
	25	210150

Double Male-Female Adapter

- .250 (6.4mm) tab size



Qty/ Pkg	Part #
5	230613
25	210613

Related Products



Crimping Tools
pages 51-53

Coax Cable Fittings

	Description	Hex	Wire Size	Qty/ Pkg	Part #
BNC Connectors					
	Crimp-On Male Plug	.320/.250	RG59	1	203100
UHF Connectors					
	Twist UHF Male Plug (PL259)		RG58	1	202175
			RG8X	1	202176
	Solder On UHF Male Plug (PL259)		RG8U/ RG213	1	200259
	Double Female (PL258)			1	200258

Related Products



Coaxial Cable
page 18

TECH TIP

Installation Instructions for Twist-on Connectors

1. To install Ancor twist-on connectors, strip the cable to expose 9/16" of the center conductor. Strip the outer jacket to expose 1/4" of the braid. Make sure that the braided shield does not touch the inner conductor.
2. Insert the cable into the connector until the center conductor protrudes through the center of the connector.
3. Twist the small knurled end while gently pushing the connector onto the cable until resistance is felt. Crimp or solder the center conductor.
4. Cut off any excess. It is strongly recommended that a piece of Ancor 3/4" heat shrink be installed on all exterior UHF connectors to waterproof and relieve strain.

Tinned Copper Lugs


- Ancor Marine Grade® lugs are manufactured from heavy-duty annealed tinned copper, providing for maximum current flow
- 100% tin plated copper resists corrosion from salt and moisture
- Seamless barrel design allows for maximum strength when crimped
- Closed end design seals out moisture so cables stay dry and corrosion free
- UL 486A



AWG	Screw Size	Qty/ Pkg	Part #
8 8 mm ²	#10 4.8 mm	2	252233
		25	242233
		100	244233
	1/4" 6.4 mm	2	252234
		25	242234
		100	244234
	5/16" 7.9 mm	2	252235
		25	242235
		100	244235
	3/8" 9.5 mm	2	252236
		25	242236
		100	244236
	1/2" 12.7 mm	2	252237
		10	242237
6 13 mm ²	#10 4.8 mm	2	252243
		25	242243
		100	244243
	1/4" 6.4 mm	2	252244
		25	242244
		100	244244
	5/16" 7.9 mm	2	252245
		25	242245
		100	244245
	3/8" 9.5 mm	2	252246
		25	242246
		100	244246
	1/2" 12.7 mm	2	252247
		10	242247
	5/16" & 3/8" 7.9 & 9.5 mm	1/1	252241

AWG	Screw Size	Qty/ Pkg	Part #
4 21 mm ²	#10 4.8 mm	2	252253
		25	242253
		100	244253
	1/4" 6.4 mm	2	252254
		25	242254
		100	244254
	5/16" 7.9 mm	2	252255
		25	242255
		100	244255
	3/8" 9.5 mm	2	252256
		25	242256
		100	244256
	1/2" 12.7 mm	2	252257
		10	242257
2 34 mm ²	5/16" & 3/8" 7.9 & 9.5 mm	1/1	252251
		2	252264
		25	242264
	1/4" 6.4 mm	2	252265
		25	242265
		100	244265
	5/16" 7.9 mm	2	252266
		25	242266
		100	244266
	3/8" 9.5 mm	2	252267
		10	242267
		100	244267
1 42 mm ²	5/16" & 3/8" 7.9 & 9.5 mm	1/1	252261
		2	252274
		25	242274
	1/4" 6.4 mm	2	252275
		25	242275
		100	244275
	5/16" 7.9 mm	2	252276
		25	242276
		100	244276
	3/8" 9.5 mm	2	252277
		10	242277
		100	244277

AWG	Screw Size	Qty/ Pkg	Part #
1/0 53 mm ²	1/4" 6.4 mm	2	252284
		25	242284
		100	244284
	5/16" 7.9 mm	2	252285
		25	242285
		100	244285
	3/8" 9.5 mm	2	252286
		25	242286
		100	244286
	1/2" 12.7 mm	2	252287
		10	242287
		100	244287
2/0 68 mm ²	1/4" 6.4 mm	2	252294
		25	242294
		100	244294
	5/16" 7.9 mm	2	252295
		25	242295
		100	244295
	3/8" 9.5 mm	2	252296
		25	242296
		100	244296
	1/2" 12.7 mm	2	252297
		10	242297
		100	244297
3/0 85 mm ²	5/16" 7.9 mm	2	252715
		10	242715
		100	2442715
	3/8" 9.5 mm	2	252716
		10	242716
		100	2442716
	1/2" 12.7 mm	2	252717
		10	242717
		100	2442717
	5/16" 7.9 mm	2	252725
		10	242725
		100	2442725
4/0 107 mm ²	3/8" 9.5 mm	2	252726
		10	242726
		100	2442726
	1/2" 12.7 mm	2	252727
		10	242727
		100	2442727

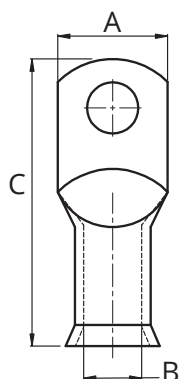

Lug Dimensions

AWG	A	B	C
8	0.465"	0.190"	1.313"
6	0.540"	0.232"	1.512"
4	0.545"	0.280"	1.606"
2	0.650"	0.336"	1.622"-1.772"
1	0.645"	0.360"	1.718"-1.845"
1/0	0.725"	0.410"	1.845"

AWG	A	B	C
2/0	0.825"	0.460"	2.236"-2.268"
3/0	0.910"	0.510"	2.323"
4/0	1.015"	0.560"	2.563"

Related Products



Crimping Tools
pages 51-53

90° Tinned Copper Lugs **NEW**

90° bend for ease of wire routing

AWG	Screw Size		Qty/ Pkg	Part #
6 13 mm ²	5/16"	7.9 mm	2	262245
	3/8"	9.5 mm	2	262246
4 21 mm ²	5/16"	7.9 mm	2	262255
	3/8"	9.5 mm	2	262256
2 34 mm ²	5/16"	7.9 mm	2	262265
	3/8"	9.5 mm	2	262266
1 42 mm ²	5/16"	7.9 mm	2	262275
	3/8"	9.5 mm	2	262276
1/0 53 mm ²	5/16"	7.9 mm	2	262285
	3/8"	9.5 mm	2	262286
2/0 68 mm ²	5/16"	7.9 mm	2	262295
	3/8"	9.5 mm	2	262296
3/0 85 mm ²	5/16"	7.9 mm	2	262715
	3/8"	9.5 mm	2	262716
4/0 107 mm ²	5/16"	7.9 mm	2	262725
	3/8"	9.5 mm	2	262726



Battery Terminal Cleaner

- High impact construction
- Wide, easy grip
- Excellent for hard-to-reach batteries

Part # 700103


EXPANDED OFFERING

Heavy-duty Butt Connectors

100% Tinned Copper


AWG		Qty/ Pkg	Part #	
8	8 mm ²	2	252130	
		25	242130	NEW
6	13 mm ²	2	252140	
		25	242140	NEW
4	21 mm ²	2	252150	
		25	242150	NEW
2	34 mm ²	2	252160	
		25	242160	NEW
1	42 mm ²	2	252170	
		25	242170	NEW
1/0	53 mm ²	2	252180	
		25	242180	NEW
2/0	68 mm ²	2	252190	
		25	242190	NEW



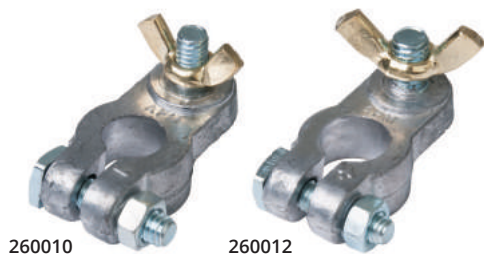

Tinned Brass Battery Terminals

Description	Positive/ Negative	Stud Size	Qty/ Pkg	Part #
Wing Nut	Negative	5/16" (8 mm)	1	260010
Style Yellow	Positive	3/8" (10 mm)	1	260012
Brass Nut	Pos/Neg	5/16" & 3/8" (8 & 10 mm)	1/1	260322

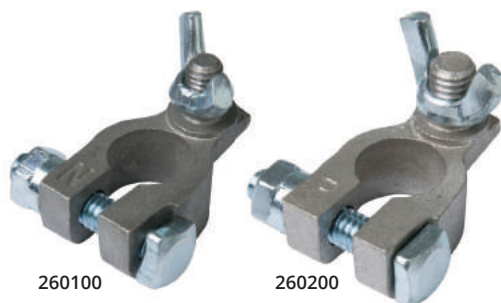

Lead Battery Terminals

Description	Positive/ Negative	Stud Size	Qty/ Pkg	Part #
Wing Nut	Negative	5/16" (8 mm)	1	260100
Style Yellow	Positive	3/8" (10 mm)	1	260200
Brass Nut	Pos/Neg	5/16" & 3/8" (8 & 10 mm)	1/1	260325



Battery Terminal Boots

Description	Size	Color	Qty/ Pkg	Part #
Wing Nut Style	4 & 2 (19 & 32 mm ²)	Black/Red	1/1	260350
Right Angle	8-2 (8-32 mm ²)	Red	1	260381



Battery Clips

Color	Size	Qty/ Pkg	Part #
Red/Black	10A	1/1	260505



Dielectric Silicone Compound

- Fights oxidation to improve conductivity
- Penetrates aluminum oxide to maintain current paths
- Temperature rated at 40° to 500°F / 4°C to 260°C
- 1/3 oz tube

Part # 700115

WIRE MANAGEMENT

Adhesive Lined Heat Shrink Tubing



38

Ancor uses crosslinked polyolefin material for its superior strength and burn resistance. A heat activated adhesive lining creates an impervious seal and provides strain relief.

Repair & Electrical Tape



40

A wide range of repair tape and electrical tape in multiple colors.

Cable Ties



41

Ancor offers a wide variety of materials, sizes and styles including the innovative Self-Cutting Cable Tie which is now available in a mounting version.

Wire Seals



46

Overlapping clamping spines allow for superior pull-out resistance and protection. Strain relief fittings are resistant to salt water, acids, oil, and are not corrosive for marine applications.



WIRE MANAGEMENT

Cable Clamps



45

Stainless steel and Nylon cable clamps are corrosion resistant for marine applications. They absorb shock and vibrations; reducing unwanted noise.

Grommets



46

Provides abrasion resistance for wires passing through panel holes. Flexible construction makes installation simple.

Split Loom & Spiral Wrap



46

Allows flexible routing of cable harnesses and provides abrasion resistance for wire and cable.

Wire Management Kits



47

Ancor offers a wide variety of preassembled kits for all of your wire management projects.

Wire management is integral in making sure that wires and connections are kept organized and protected per ABYC

Adhesive Lined Heat Shrink Tubing (ALT)

- Cross Linked polyolefin tubing is much stronger than PVC tubing and will not burn like PVC
- Heat activated adhesive lining provides impervious seal to salt water, oil, acids, and sunlight as well as providing strain relief
- Highest shrink ratio - shrinks to 1/3 original size
- Shrinks at 257°F / 125°C
- Operating temperature range of -40°F to 230°F / -40°C to 110°C



Wire Range	ALT Dia	Color	Length	Qty/ Pkg	Part #
<18 AWG <0.8 mm ²	<1/8" <3.2 mm	Black	3" 7.6 cm	3	301103
			6" 15.2 cm	10	301106
			12" 30.5 cm	10	301124
			48" 122 cm	1	301148
20-12 AWG 0.5-3 mm ²	3/16" 4.8 mm	Black	3" 7.6 cm	3	302103
			6" 15.2 cm	10	302106
			12" 30.5 cm	10	302124
			48" 122 cm	1	302148
	3/8" 9.5 mm	Red	3" 7.6 cm	3	302603
			6" 15.2 cm	10	302606
			12" 30.5 cm	10	302624
			48" 122 cm	1	302648
16-10 AWG 1-5 mm ²	1/4" 6.4 mm	Black	3" 7.6 cm	3	303103
			6" 15.2 cm	10	303106
			12" 30.5 cm	10	303124
			48" 122 cm	1	303148
	3/8" 9.5 mm	Black/Red	3" 7.6 cm	1/1	303602
			6" 15.2 cm	5	303603
			12" 30.5 cm	10	303624
			48" 122 cm	1	303648
12-8 AWG 3-8 mm ²	3/8" 9.5 mm	Black	3" 7.6 cm	3	304103
			6" 15.2 cm	5	304106
			12" 30.5 cm	5	304124
			48" 122 cm	1	304148
	3/4" 12.7 mm	Black/Red	3" 7.6 cm	1/1	304602
			6" 15.2 cm	5	304603
			12" 30.5 cm	5	304624
			48" 122 cm	1	304648
8-4 AWG 8-19 mm ²	1/2" 12.7 mm	Black	3" 7.6 cm	3	305103
			6" 15.2 cm	5	305106
			12" 30.5 cm	5	305124
			48" 122 cm	1	305148
	3/4" 19 mm	Black/Red	3" 7.6 cm	1/1	305602
			6" 15.2 cm	5	305603
			12" 30.5 cm	5	305624
			48" 122 cm	1	305648

Wire Range	ALT Dia	Color	Length	Qty/ Pkg	Part #
8-2/0 AWG 13-62 mm ²	3/4" 19 mm	Black	3" 7.6 cm	3	306103
			6" 15.2 cm	4	306106
			12" 30.5 cm	4	306124
			48" 122 cm	1	306148
		Black/Red	3" 7.6 cm	1/1	306602
			6" 15.2 cm	3	306603
			12" 30.5 cm	4	306606
			48" 122 cm	1	306648
		Red	3" 7.6 cm	3	306903
			6" 15.2 cm	4	306906
			12" 30.5 cm	4	306924
			48" 122 cm	1	306948
2-4/0 AWG 32-103 mm ²	1" 25.4 mm	Black	3" 7.6 cm	3	307103
			6" 15.2 cm	3	307106
			12" 30.5 cm	3	307124
			48" 122 cm	1	307148
		Black/Red	3" 7.6 cm	1/1	307602
			6" 15.2 cm	3	307603
			12" 30.5 cm	3	307606
			48" 122 cm	1	307648
		Red	3" 7.6 cm	3	307903
			6" 15.2 cm	4	307906
			12" 30.5 cm	4	307924
			48" 122 cm	1	307948

Kits

Wire Range	ALT Dia	Color	Length	Qty/ Pkg	Part #
20-2/0 AWG .5-62 mm ²	3/16"-3/4" 4.8-19 mm	Black	3" 7.6 cm	8	301503
			6" 15.2 cm	8	301506
12-8 AWG 3-8 mm ²	3/8" 9.5 mm	Assorted (yw, wh, bl, gr, rd)	3" 30.5 cm	5	304503
			6" 122 cm	5	304506
8-2/0 AWG 8-62 mm ²	3/4" 19 mm	Assorted (yw, wh, bl, gr)	3" 7.6 cm	4	306503

Adhesive Lined Tubing Specifications (3:1 ratio)

Size	Shrinks to	Wire Range (AWG)
1/8" 3.2 mm	1/32" 0.8 mm	<18 < 0.8 mm ²
3/16" 4.8 mm	1/16" 1.6 mm	20-12 0.5-3 mm ²
1/4" 6.4 mm	5/64" 2 mm	16-10 1-5 mm ²
3/8" 9.5 mm	1/8" 3.2 mm	12-8 3-8 mm ²
1/2" 12.7 mm	5/32" 4 mm	8-4 8-19 mm ²
3/4" 19 mm	1/4" 6.4 mm	8-2/0 13-62 mm ²
1" 25.4 mm	5/16" 7.9 mm	2-4/0 32-103 mm ²

Related Products



Nylon terminals
page 29



Heat Tools
page 54

Adhesive Lined Heavy Wall Battery Cable Tubing (BCT)

- 3:1 ratio
- Shrinks at 257°F / 125°C
- UL 224



BCT Dia.	BCT Color	Length		Qty/ Pkg	Part #
3/4" 19 mm	Black	3"	7.6 cm	3	326103
		6"	15.2 cm	3	326106
		12"	30.5 cm	3	326124
		48"	122 cm	1	326148
	Black/Red	3"	7.6 cm	1/1	326202
	Red	3"	7.6 cm	3	326603
		6"	15.2 cm	3	326606
		12"	30.5 cm	3	326624
		48"	122 cm	1	326648
	Yellow	3"	7.6 cm	3	326903
		6"	15.2 cm	3	326906
		12"	30.5 cm	3	326924

BCT Dia.	BCT Color	Length		Qty/ Pkg	Part #
1" 25 mm	Black	3"	7.6 cm	2	327103
		6"	15.2 cm	2	327106
		12"	30.5 cm	2	327124
		48"	122 cm	1	327148
	Black/Red	3"	7.6 cm	1/1	327202
	Red	3"	7.6 cm	2	327603
		6"	15.2 cm	2	327606
		12"	30.5 cm	2	327624
		48"	122 cm	1	327648
	Yellow	3"	7.6 cm	2	327903
		6"	15.2 cm	2	327906
		12"	30.5 cm	2	327924

Adhesive Lined Heavy Wall Tubing Specifications (3:1 ratio)

Size	Shrinks to	Wire Range (AWG)	
3/4" 19 mm	1/4" 6 mm	8-2/0	13-62 mm²
1" 25 mm	3/8" 9 mm	2-4/0	32-103 mm²



TECH TIP

Properly Shrinking Heat Shrink Tubing

To properly shrink heat shrink tubing, start by selecting a heat source that will apply the appropriate temperature. Heat shrink tubing will state the shrink temperature, while heat tools are rated based on flame temperatures. Once a heat tool is selected, apply heat gradually to avoid shrinking the tubing inconsistently or burning the tubing. Additionally, continually moving the heat source along the length of the tube will reduce the likelihood of burning the tubing during installation.

Related Products



Lugs
page 33



Heat Tools
page 54

Repair Tape

Repair tape fuses only to itself when applied under tension. No sticky residue remains on wrapped surfaces.

- Operates and remains flexible from -60°F to 500°F / -51°C to 260°C
- Stretches up to 300% its original length with 60 ppi tear strength
- A permanent air and water tight seal
- Excellent UV resistance
- Begins to bond immediately on contact with itself

Color	Length	Part #	Pkg Qty
Black	1"x10'	341010	1/roll
Clear	1"x10'	343010	1/roll
Red	1"x10'	346010	1/roll
White	1"x10'	347010	1/roll



Premium Electrical Tape

Quality electrical tape designed for general purpose electrical applications.

- Made from low-lead 7-mil PVC material
- For applications up to 600V
- Temp rating up to 176°F / 80°C
- UV and moisture resistant

Color	Length	Part #	Pkg Qty
Black	3/4"x66'	331066	1/roll
Red	3/4"x66'	336066	1/roll
White	3/4"x66'	337066	1/roll
Assorted (1 ea of black, red, white, green & yellow)	1/2"x20'	339066	5/roll



Cable Ties

Ancor offers a wide variety of materials, styles, and sizing options.

With a unique design and high-quality construction, Ancor cable ties provide a great solution for bundling wire, cable, hoses, cords, and countless other applications.



Standard Cable Ties

Length	Color	Unit Qty	Part #		Bundle Dia Max	Tensile Strength
4"	natural	25	199200	yes	13/16"	18 lbs
		100	199201	yes	13/16"	18 lbs
		1000	199344	yes	13/16"	18 lbs
	UVB*	25	199202	yes	13/16"	18 lbs
		100	199203	yes	13/16"	18 lbs
		1000	199349	yes	13/16"	18 lbs
6"	natural	25	199246	yes	1-3/8"	45 lbs
		100	199247	yes	1-3/8"	45 lbs
		1000	199345	yes	1-3/8"	45 lbs
	UVB*	25	199248	yes	1-3/8"	45 lbs
		100	199249	yes	1-3/8"	45 lbs
		1000	199350	yes	1-3/8"	45 lbs
8"	natural	25	199204	yes	2"	75 lbs
		100	199205	yes	2"	75 lbs
		1000	199346	yes	2"	75 lbs
	UVB*	25	199206	yes	2"	75 lbs
		100	199207	yes	2"	75 lbs
		1000	199254	yes	2"	75 lbs
11"	natural	25	199208	yes	3"	75 lbs
		100	199209	yes	3"	75 lbs
		1000	199347	yes	3"	75 lbs
	UVB*	25	199210	yes	3"	75 lbs
		100	199211	yes	3"	75 lbs
		1000	199351	yes	3"	75 lbs
14"	natural	25	199212	yes	4"	75 lbs
		100	199213	yes	4"	75 lbs
		1000	199348	yes	4"	75 lbs
	UVB*	25	199214	yes	4"	75 lbs
		100	199215	yes	4"	75 lbs
		1000	199352	yes	4"	75 lbs

* UV Resistant



Heavy-duty Cable Ties

Length	Color	Unit Qty	Part #		Bundle Dia Max	Tensile Strength
15"	UVB*	25	199259	yes	4"	175 lbs
		100	199260	yes	4"	175 lbs
17"	natural	10	199216	yes	4-9/10"	175 lbs
	UVB*	10	199217	yes	4-9/10"	175 lbs
24"	natural	10	199218	yes	7"	175 lbs
	UVB*	10	199219	yes	7"	175 lbs
36"	natural	10	199220	yes	10-3/10"	175 lbs
	UVB*	10	199221	yes	10-3/10"	175 lbs
48"	natural	10	199222	yes	14-3/10"	175 lbs
	UVB*	10	199223	yes	14-3/10"	175 lbs

* UV Resistant

LEARN MORE
Cable Ties Video



Visit Ancor Products
on YouTube.com

Related Products



NEW Diagonal
Cutting Pliers
page 55



Mounting Bases
page 42

Mounting Cable Ties



Length	Color	Unit Qty	Part #		Bundle Dia Max	Tensile Strength
4"	UVB*	25	199245	yes	3/4"	18 lbs
	natural	25	199250	yes	1-3/8"	30 lbs
6"	natural	100	199251	yes	1-3/8"	30 lbs
	UVB*	25	199252	yes	1-3/8"	30 lbs
		100	199253	yes	1-3/8"	30 lbs
	natural	25	199226	yes	2"	50 lbs
8"	natural	100	199227	yes	2"	50 lbs
	UVB*	25	199228	yes	2"	50 lbs
		100	199229	yes	2"	50 lbs
	natural	25	199230	yes	4"	50 lbs
14"	UVB*	25	199257	yes	4"	50 lbs
		100	199258	yes	4"	50 lbs

* UV Resistant

LEARN MORE
Cable Ties Video



Visit Ancor Products
on YouTube.com

Cable Tie Kits

Length	Description	Unit Qty	Part #		Bundle Dia Max	Tensile Strength
8"	assorted colors	24	199224	yes	2"	75 lbs
4", 6", 8"	natural/UVB*	25	199261	yes	13/16", 2"	18, 75 lbs
4", 6", 8"	natural color	500	199225	yes	13/16", 1-1/2", 2"	18, 45, 75 lbs

* UV Resistant

▲ DoubleLock™ on 6" and 8" ties only



199224

199261

199225

Low Profile/Hose Cable Ties

- Reduced head height and contour design conforms to the shape of the wire bundle or hose
- Round design and side tail entry creates a round shape optimal for hoses
- Trimmed tail retracts into cavity leaving a clean, low profile installation
- Tamper-proof pawl is inaccessible after installation
- 50 lbs tensile strength exceeds industry standards



Length	Color	Unit Qty	Part #	Tensile Strength
8"	UVB*	20/bag	199324	50 lbs
		100/bag	199325	50 lbs
11"	UVB*	20/bag	199328	50 lbs
		100/bag	199329	50 lbs

* UV Resistant



Screw Mounting Bases

- #8 bases, 7/10" x 1/2"
- #10 bases, 1" x 5/8"

Description	Unit Qty	Part #
#8 screw, natural	25	199231
	100	199232
#10 screw, natural	25	199262
	100	199263



199262

Adhesive Lined Mounting Bases

- 1" x 1"

Description	Unit Qty	Part #
Natural	5	199233
	25	199234
UVB*	5	199235
	25	199236

* UV Resistant

199233



199235

Self-cutting Cable Ties

Save time and frustration using the latest innovation from Ancor, a self-cutting cable tie. Simply lock and twist to finish the job, with no need for additional tools! Integrated stainless steel blade leaves a clean flush cut, which improves appearance and eliminates the sharp tail while maintaining a tensile strength above industry standards.



Standard Self-cutting Cable Ties

Length	Color	Unit Qty	Part #	Tensile Strength
4"	Natural	50/bag	199333	35 lbs
		500/bag	199334	35 lbs
	UVB*	50/bag	199336	35 lbs
		500/bag	199337	35 lbs
6"	Natural	50/bag	199339	35 lbs
		500/bag	199340	35 lbs
	UVB*	50/bag	199342	35 lbs
		500/bag	199343	35 lbs
8"	Natural	20/bag	199274	50 lbs
		50/bag	199275	50 lbs
		500/bag	199267	50 lbs
	UVB*	20/bag	199276	50 lbs
		50/bag	199277	50 lbs
		500/bag	199264	50 lbs
11"	Natural	20/bag	199278	50 lbs
		50/bag	199279	50 lbs
		500/bag	199268	50 lbs
	UVB*	20/bag	199280	50 lbs
		50/bag	199281	50 lbs
		500/bag	199265	50 lbs
14"	Natural	20/bag	199282	50 lbs
		50/bag	199283	50 lbs
		500/bag	199269	50 lbs
	UVB*	20/bag	199284	50 lbs
		50/bag	199285	50 lbs
		500/bag	199266	50 lbs

* UV Resistant



Heavy-duty Self-cutting Cable Ties

Length	Color	Unit Qty	Part #	Tensile Strength
15"	Natural	20/bag	199320	120 lbs
		100/bag	199321	120 lbs
	UVB*	20/bag	199318	120 lbs
		100/bag	199319	120 lbs
17"	Natural	10/bag	199323	120 lbs
	UVB*	10/bag	199322	120 lbs

* UV Resistant

**NO TOOLS.
JUST TWIST!**



LEARN MORE
Cable Ties Video



Visit Ancor Products
on YouTube.com



TECH TIP

Wire Bundling Per ABYC Guidelines

ABYC states: "Conductors shall be supported throughout their length or shall be secured at least every 18 inches (455mm) by one of the following methods:


- By means of non-metallic clamps sized to hold the conductors firmly in place. The material shall be resistant to oil, gasoline, and water and shall not break or crack within a temperature range of 30°F (-34°C) to 250°F (121°C)

All of Ancor's cable ties are resistant to oil, gasoline, and water and are rated for use within the ABYC specified range.

Related Products



Mounting Bases
page 42



Mounting Self-cutting Cable Ties

Length	Color	Unit Qty	Part #	Tensile Strength
8"	Natural	20/bag	199309	50 lbs
		50/bag	199310	50 lbs
		500/bag	199311	50 lbs
	UVB*	20/bag	199300	50 lbs
		50/bag	199301	50 lbs
		500/bag	199302	50 lbs
11"	Natural	20/bag	199312	50 lbs
		50/bag	199313	50 lbs
		500/bag	199314	50 lbs
	UVB*	20/bag	199303	50 lbs
		50/bag	199304	50 lbs
		500/bag	199305	50 lbs
14"	Natural	20/bag	199315	50 lbs
		50/bag	199316	50 lbs
		500/bag	199317	50 lbs
	UVB*	20/bag	199306	50 lbs
		50/bag	199307	50 lbs
		500/bag	199308	50 lbs


* UV Resistant

TECH TIP

Cable Ties and Moisture

To prevent brittleness and cracking, a certain amount of moisture is incorporated into the Nylon 6/6 material that makes cable ties. Over time, this added moisture can evaporate; especially in dry conditions with low relative humidity. The following steps will help cable ties maintain their pliability and tensile strength:

- Cable ties should be stored in the manufacturer's original packaging until ready for use.
- Partial cable tie bags should be closed or sealed if at all possible. Several drops of water can be added to the bag to provide moisture.
- Cable ties should not be stored in an unheated warehouse or similar location.
- Cable ties inventory should be rotated frequently and used within one year of purchase.

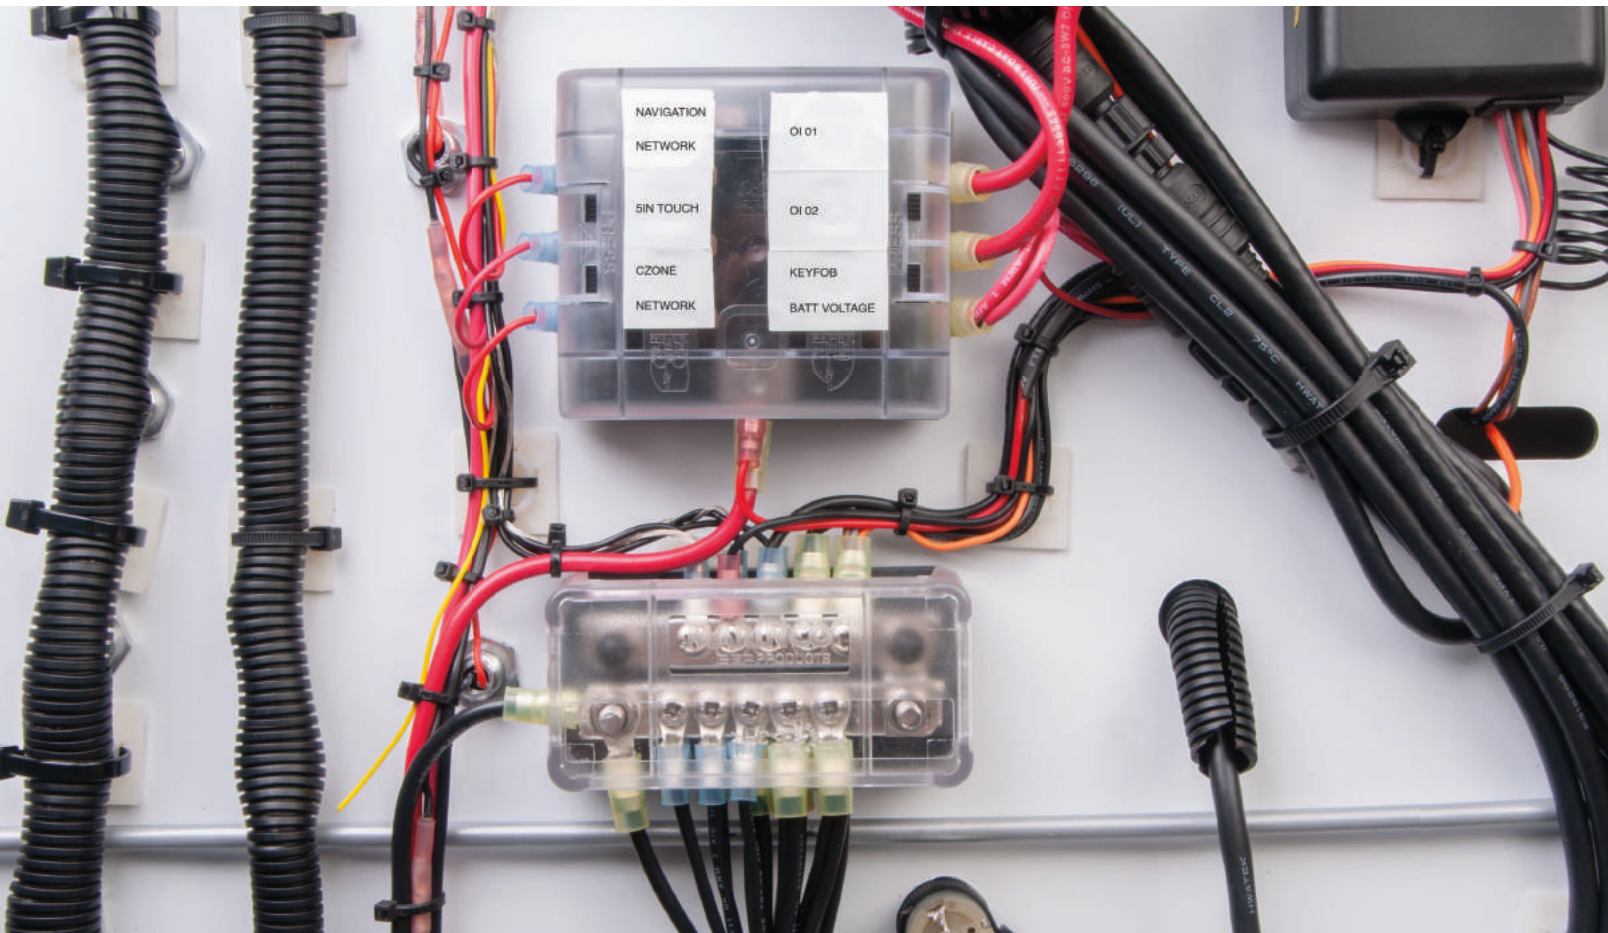

Stainless Steel Cushion Clamps

- Prevents corrosion
- Resistant to oils, acids, salt water
- Temperatures range from -50° to 300°F / -46°C to 149°C
- Absorbs shock and vibration
- Reduces unwanted noise
- 1/4" clearance mounting hole
- 304 stainless steel



Nominal I.D.	Qty/ Pkg	Part #	Band Thickness	Width w/ Cushion	Screw Size
3/16" 5 mm	10	403182	0.04	3/8" 10 mm	#8 4 mm
1/4" 6 mm	10	403252	0.04	3/8" 10 mm	#8 4 mm
5/16" 8 mm	10	403312	0.04	3/8" 10 mm	#8 4 mm
3/8" 10 mm	10	403372	0.04	3/8" 10 mm	#8 4 mm
1/2" 13 mm	10	403502	0.06	1/2" 13 mm	#10 5 mm
9/16" 14 mm	10	403562	0.06	1/2" 13 mm	#10 5 mm
5/8" 16 mm	10	403622	0.06	1/2" 13 mm	#10 5 mm
3/4" 19 mm	10	403752	0.06	1/2" 13 mm	#10 5 mm
7/8" 22 mm	10	403872	0.06	1/2" 13 mm	#10 5 mm
1" 25 mm	10	403892	0.06	1/2" 13 mm	#10 5 mm
1-1/4" 32 mm	10	403902	0.06	1/2" 13 mm	#10 5 mm
1-1/2" 38 mm	10	404152	0.06	1/2" 13 mm	#10 5 mm
1-3/4" 44 mm	10	404172	0.06	1/2" 13 mm	#10 5 mm
2" 51 mm	10	404202	0.06	1/2" 13 mm	#10 5 mm
2-1/2" 64 mm	10	404252	0.06	1/2" 13 mm	#10 5 mm
3" 76 mm	10	404302	0.06	1/2" 13 mm	#10 5 mm
3-1/2" 89 mm	10	404352	0.06	1/2" 13 mm	#10 5 mm

#8 = 0.167" / #10 = 0.203"

TECH TIP

Wire Bundling per ABYC Guidelines

ABYC states: Conductors shall be supported throughout their length or shall be secured at least every 18 inches (455mm) by one of the following methods:

- By means of non-metallic clamps sized to hold the conductors firmly in place. The material shall be resistant to oil, gasoline, and water and shall not break or crack within a temperature range of 30°F to 250°F (-34°C to 121°C)
- By means of metal clamps lined with an insulating material resistant to the effects of oil, gasoline, and water

All of Ancor's cable clamps are resistant to oil, gasoline, and water and are rated for use within the ABYC specified range. Stainless steel cushion clamps are designed to perform within a wider temperature range and provide additional shock, vibration and noise protection compared to nylon cable clamps.

Nylon Cable Clamps

- Made from nylon for maximum strength
- Resistant to solvents, oils, acids and moisture
- Unique screw hole alignment feature to speed installation
- Absorbs shock and vibration; reduces unwanted noise



Nominal I.D.	Color	Qty/ Pkg	Part #
1/8" 3 mm	Natural	25	401122
3/16" 5 mm	Natural	25	401182
		6	401251
1/4" 6 mm	Natural	25	401252
		100	401255
	UV Black	25	402252
5/16" 7 mm	Natural	25	401312
	UV Black	25	402312
		25	401372
3/8" 9 mm	Natural	100	401375
	UV Black	25	402372
7/16" 11 mm	Natural	25	401432
	Natural	25	401502
1/2" 12 mm	UV Black	25	402502

Nominal I.D.	Color	Qty/ Pkg	Part #
5/8" 15 mm	Natural	25	401622
	UV Black	25	402622
3/4" 19 mm	Natural	25	401752
	UV Black	25	402752
1" 25 mm	Natural	25	401892
	UV Black	25	402892
1-1/4" 32 mm	Natural	25	401912
1-1/2" 38 mm	Natural	25	401932

Kit

- (9) of each 1/8", 3/16", 1/4", 5/16", 3/8" & 1/2"

Nominal I.D.	Color	Qty/ Pkg	Part #
1/8"-1/2"	3-12 mm	Natural	54
			400000

Wire Seals

- Made of Nylon 6/6 flame resistant, self extinguishing Buna-N form seal
- All seals exceed NEMA Type 4X and Type 6 specs
- Overlapping clamping spines allow for superior pull-out protection and resistance
- Strain relief fittings are resistant to salt water, acids, alkalis, alcohol, oils and are non-corrosive for use in the marine environment
- Good underwater to 300 feet / 91.4 m (150 PSIG) provided there is a liquid tight seal between body and housing
- Provide low cost cable entries into panels and junction boxes
- UL 94 v-0



Description	For Use with	Thread Size	Cable Range	Clearance Hole	Body Length	Thread Length	Qty/ Pkg	Part #
Round Cable	18-10 AWG	3/8" NPT	.08"-.24" 2-6 mm	.68"	.87"	.59"	1	764998
Round Cable	10-2 AWG	1/2" NPT	.20"-.47" 5-12 mm	.83"	1.06"	.51"	1	765000
Round or Flat Cable	4-1, 14/3-12/3 & 12/2-10/2 AWG	1/2" NPT	.24"-.55" 6-14 mm	.83"	1.10"	.51"	1	765002
Round Cable	1-3/0 AWG	3/4" NPT	.51"-.71" 13-18 mm	1.05"	1.22"	.51"	1	765004
Round Cable	4/0 AWG	1" NPT	.71"-.98" 18-25 mm	1.35"	1.53"	.75"	1	765006
Flat Cable	14/3-12/3 & 10/2	1/2" NPT	.31"-.56" 8-14 mm	.83"	1.10"	.51"	1	765010
Flat Cable	12/3	3/4" NPT	.31"-.56" 8-14 mm	1.05"	1.22"	.51"	1	765012

Grommets

- Provide instant abrasion resistance to wires passing through panel holes
- Flexible black vinyl makes installation simple

Hole Size	Inside Diameter	Panel Width	Qty/ Pkg	Part #
3/8" 10 mm	1/4" 6 mm	3/32" 2 mm	5	760375
1/2" 13 mm	3/8" 10 mm	3/32" 2 mm	5	760500
1/4-3/4" Assortment Combo Pack (10 each of 1/4", 5/16", and 3/8", 5 each of 1/2", 11/16", and 3/4")			45	750000



Spiral Wrap & Split Loom

- Permits flexible routing of cable harnesses
- Provides abrasion protection for wire and cable
- Allows lead outs at any point for greatest ease of installation
- Split loom temperature range is -40°F to 275°F / -40°C to 135°C



Marine Grade® Spiral Wrap

Diameter	Ft/Pkg	Part #	Bundle Range	
			Min	Max
1/4" 6 mm	10'	452251	3/16" 4.8 mm	2" 5 cm
3/8" 10 mm	10'	452381	5/16" 8 mm	3" 7.6 cm
	100'	452385		
1/2" 13 mm	10'	452501	25/64" 10 mm	4" 10.2 cm
	100'	452505		
3/4" 19 mm	10'	452751	3/4" 19 mm	5" 12.7 cm
	100'	452755		
1" 25 mm	5'	452900	1" 25 mm	7" 17.8 cm
	100'	452905		

TECH TIP

Wire Bundling per ABYC Guidelines

ABYC states: "Conductors that may be exposed to physical damage shall be protected by loom, conduit, tape, raceways, or other equivalent protection. When AC and DC conductors are run together, the AC conductors shall be sheathed, bundled, or otherwise kept separate from the DC conductors. Loom used to cover conductors shall be self-extinguishing. The base product (or resin) shall be classified as V-2 or better, in accordance with UL 94, Tests For Flammability Of Plastic Materials."



Self-extinguishing Split Loom

Diameter	Ft/Pkg	Part #
3/8" 10 mm	10'	453382
	100'	453386
1/2" 13 mm	10'	453502
	100'	453506
3/4" 19 mm	10'	453752
	100'	453756
1" 25 mm	5'	453901
	100'	453906

Wire Management Kits



160 Piece Heat Shrink Connectors and Terminals Kit

Butt Connectors

- (10) 22-18 AWG, (20) 16-14 AWG, (10) 12-10 AWG

Ring Terminals

- (15) 22-18 AWG #10, (15) 16-14 AWG #8, (15) 16-14 AWG #10, (15) 16-14 AWG 1/4", (10) 12-10 AWG #10, (10) 12-10 AWG 1/4", (10) 12-10 AWG 3/8"

Disconnects

- (20) 16-14 AWG female, (10) 16-14 AWG male

Part # 320101



440 Piece Nylon Connectors and Terminals Kit

Butt Connectors

- (40) 22-18 AWG, (75) 16-14 AWG, (40) 12-10 AWG

Ring Terminals

- (25) 22-18 AWG #8, (25) 16-14 AWG #8, (50) 16-14 AWG #10, (25) 12-10 AWG #8, (25) 12-10 AWG #10

Disconnects

- (50) 16-14 AWG fully insulated female, (30) 16-14 AWG fully insulated male, (25) 16-14 AWG female, (30) 16-14 AWG male

Part # 250101



100 Piece Tinned Copper Lug Kit

- (10) 8 AWG, 5/16", (10) 8 AWG, 3/8"
- (10) 6 AWG, 5/16", (10) 6 AWG, 3/8"
- (10) 4 AWG, 5/16", (10) 4 AWG, 3/8"
- (10) 2 AWG, 5/16", (10) 2 AWG, 3/8"
- (5) 1/0 AWG, 5/16", (5) 1/0 AWG, 3/8"
- (5) 2/0 AWG, 5/16", (5) 2/0 AWG, 3/8"

Part # 255101



47 Piece Adhesive Lined Heat Shrink Tubing Kit

Black

- (10) 3/16" x 6"
- (10) 1/4" x 6"
- (10) 3/8" x 6"
- (5) 1/2" x 6"
- (3) 3/4" x 3"
- (3) 1" x 3"

Red

- (3) 3/4" x 3"
- (3) 1" x 3"

Part # 330101



Promotional Storage Rack

Part # P33407

Individual Empty Trays

Part # P33406 6 compartment

Part # P33412 12 compartment



Premium Connector Kit

- Nylon insulated with insulation grip
- Double crimp, funnel entry
- Kit includes assorted butt connectors, ring terminals, spade terminals, and disconnects (18-10 AWG)

Part # 220003 120 pcs

TOOLS & TESTERS

Cut/Strip/Crimp Tools



50

Ancor offers a broad range of wire management and termination tools for all of your wiring projects.

Crimpers



52

Ancor offers other speciality tools to provide users with everything needed for any project.



TOOLS & TESTERS

Pliers and Screwdrivers



55

Insulated pliers and screw drivers for added safety when working on an electrical project.

Heat Tools



54

Ancor offers a range of heat tools, including the new dual setting heat gun, that are perfect for multiple projects from heat shrink tubing to paint stripping.

Digital Multimeters



56

Multimeters to suit any electrical testing requirements.



Every installation requires quality tools and testing devices to ensure quick projects and larger refits can be accomplished accurately and to ABYC standards.



Wire & Cable Cutter

- Steel forged blades easily cut 22 AWG to 2/0 AWG copper wire and cable
- Contoured cushion grips for comfort and ease of use
- Length: 9.25" (23.5 cm)

Part # 703005



Heavy-duty Wire & Cable Cutter

- Steel forged blades easily cut up to 350MCM (2 sizes larger than 4/0 AWG) copper wire and cable
- Strong fiberglass handles with thermoplastic rubber grips for comfort and slip resistance
- Length: 17.5" (44.4 cm)

Part # 703006



Heavy-duty Wire Scissors

- Corrosion resistant stainless steel blades
- Ergonomic overmolded handles for comfort and safety
- Cut wire up to 6 AWG (13 mm²)
- Includes safety holster with belt clip
- Length: 5.9" (15 cm)

Part # 703007



Cut/Strip Tool

- Precision ground cutter and stripping stations
- Strips wire from 24 AWG to 10 AWG (0.5 to 2.6 mm²)
- Length: 6.6" (16.7 cm)

Part # 702008



Cut/Strip/Crimp Tool

- Precision ground cutters and stripping station
- Capacity: Crimps 22 AWG to 10 AWG / 0.3 to 5 mm² insulated and non-insulated terminals, connectors and spark plug terminals in special cavities
- Strips insulation from 22 AWG to 10 AWG / 0.3 to 5 mm² solid and stranded wires
- Cuts (4) 40/2 mm, (6) 32/4 mm, (8) 32/4.8 mm, (10) 32/6.4 mm and 10-24/6.4 mm bolts
- Length: 8.6" (20.3 cm)

Part # 702007

Premium Battery Cable Stripper

- Punctures the cable's insulation, breaks the insulation free and pulls the cut insulation from the wire in one efficient motion
- Strips 8 AWG through 400 MCM cable
- Heavy-duty construction
- Length: 5.3" (13.0 cm)

Part # 703075



Compact Automatic Wire Stripper

- Compact design perfect for use in tight spaces
- Strips without damage or marking of conductors
- Strips and cuts wire from 20 AWG to 10 AWG (0.05-5.0mm²)
- Length: 6.3" (16 cm)

Part # 702031



Automatic Wire Stripper

- Automatically adjusts to different wire sizes
- Strips without damage or marking of conductors, slim jaw for easy access, steel side cutter
- Strips and cuts wire from 24 AWG to 12 AWG / 0.02-5.0mm²
- Wire stop adjusts length of strip from 3/8" to 1/2" (9.5 to 12.7 mm)
- Length: 6.7" (17.0 cm)


Part # 702030



Universal Wire Stripper

- Two different cutting methods to cut either small gauge wire or large gauge battery cable
- Wire stripping from 20 AWG to 10 AWG (0.05-5.0mm²)
- Battery cable stripping from 8 AWG to 4/0 AWG (8 to 107mm²)
- Length: 5.7" (14.5 cm)

Part # 702032

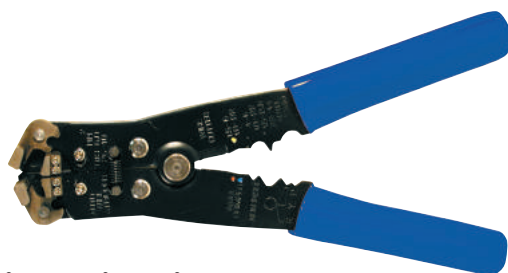

Wire Strip Crimp Tool

- Strips 26 AWG to 10 AWG stranded wire
- Automatic jaw-load wire stripper self-adjusts to strip wire
- Crimps 22 AWG to 10 AWG insulated terminals
- Length: 8.1" (20.6 cm)


Part # 702033



LEARN MORE
Universal Wire
Stripper Video




Visit Ankor Products
on YouTube.com

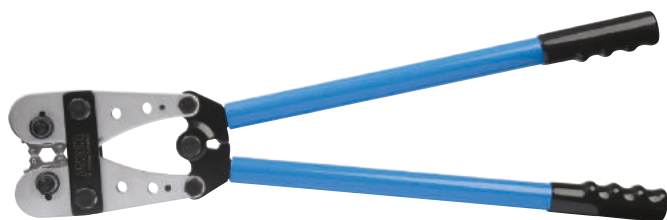

8 to 4/0 AWG Heavy-duty Hex Lug & Terminal Crimper

- Uses revolving dies to create a hex style crimp for 8 AWG to 4/0 AWG
- Length: 24.4" (62 cm)

Part # 703040

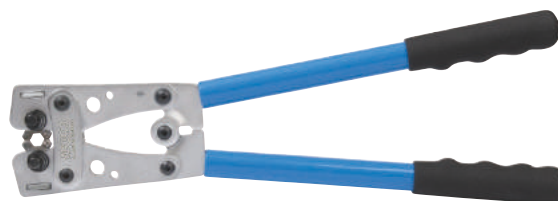

8 to 1/0 AWG Hex Lug & Terminal Crimper

- Uses revolving dies to create a hex style crimp for 8 AWG to 1/0 AWG
- For portable use
- Length: 15.4" (39 cm)

Part # 703050



22 to 8 AWG Single Crimp Ratcheting Crimper

- Ideal for crimping heat shrink terminals
- Can also be used with vinyl and nylon insulated terminals and connectors
- Must be fully closed before tool allows itself to open ensuring a proper crimp
- Includes lever to release jaws mid-cycle in the event of an incorrectly placed terminal
- Ratcheting operation with ergonomic handle to prevent hand fatigue
- 4 color-coded cavities for different wire sizes
- Length: 10.9" (27.6 cm)

Part # 703010



26 to 10 AWG Double Crimp Ratcheting Crimper

- Ideal for crimping nylon and vinyl terminals
- Double crimp mechanism crimps stranding and insulation portion of Ancor connectors in one motion for superior strain relief of vinyl and nylon terminals
- Must be fully closed before tool allows itself to open ensuring a proper crimp
- Includes lever to release jaws mid-cycle in the event of an incorrectly placed terminal
- Ratcheting operation with ergonomic handle to prevent hand fatigue
- 4 color-coded cavities for different wire sizes
- Length: 10.9" (27.6 cm)

Part # 703030

LEARN MORE
Ratcheting Crimp
Tools Video



Visit Ancor Products
on YouTube.com

TECH TIP

Tool Selection per ABYC Guidelines

ABYC recommends that the tool used to crimp connectors be manufactured by the same brand as the connectors themselves. The reason behind this is that the barrel and insulation thickness varies by connector manufacturer. Therefore having a crimping tool designed for specific connectors ensures a secure and safe crimp.



Angled 22 to 8 AWG Single Crimp Ratcheting Crimper

- For crimping heat shrink terminals
- Angled head design is ideal for use in tight spaces
- Self-releasing mechanism ensures a proper crimp
- Ratcheting operation and ergonomic handles prevent fatigue
- Length: 9.5" (24 cm)

Part # 703015



Angled 26 to 10 AWG Double Crimp Ratcheting Crimper

- For crimping nylon and vinyl terminals
- Angled head design is ideal for use in tight spaces
- Self-releasing mechanism ensures a proper crimp
- Ratcheting operation and ergonomic handles prevent fatigue
- Length: 9.5" (24 cm)

Part # 703035



Flag Terminal Die Sets

- Works with all Ancor ratcheting crimpers; 703010, 703015, 703030, 703035

Part # 703041 22-18 & 16-14 AWG

Part # 703042 12-10 AWG



703041



703042

Mini Fish Tape

- Durable, high-impact housing
- Low-memory 15 ft tape does not curl during extension—perfect for non-conduit situations
- Compact, rugged design can be stored in tool belt or box
- Feed under carpet, behind walls or through panels
- Perfect for short runs, installing speakers, instrument clusters or other common electrical uses

Part # 703112



Mini Pocket Butane Torch

- Piezo electronic ignition system
- Flame temperature up to 2500°F / 1300°C
- Windproof and waterproof flame
- Pocket size allows the unit to fit easily into any tool kit
- Powered by disposable cigarette lighter or refillable butane fuel cell (included)

Part # 703024



Pro Torch

- Up to 90 minutes of time on each filling
- Flame temperature up to 2500°F / 1300°C
- Adjustable flame control
- Compact size with ergonomic grip
- Includes removable solder tip and removable base for added flexibility
- Refillable

Part # 703060



120V Two Setting Heat Gun

- Two settings—Low: 572°F / 300°C, 10 CFM / 17 CMH and High: 1,000°F / 538°C, 17 CFM / 29 CMH (cubic meters per hour)
- 6.5' cord, 120V AC
- Great for heat shrink tubing and connectors, stripping paint and more
- Lightweight, under two pounds
- Stands on end for hands free operation
- Includes three nozzles and carrying case

Part # 703023

Three nozzles for a variety of applications



Carrying case included



Stands on end for hands free operation



Micro Therm Heat Gun

- Features Piezo electronic ignition system, providing flame less heat, safe to use around chemicals or by wire bundles when using deflector
- Powered by refillable cell
- Flame temperature up to 1300°F / 650°C
- Ideal for work in the bilge where open flame should not be used
- Refillable


Part # 702027



7 Pc Insulated Screwdriver Set **NEW**

- Kit includes:
 - (1) 1/8" x 3" Slotted (1) #0 x 3" Phillips
 - (1) 7/32" x 5" Slotted (1) #1 x 3" Phillips
 - (1) 1/4" x 6" Slotted (1) #2 x 4" Phillips
 - (1) Test probe
- Insulated to 1000V
- Includes convenient storage/carrying case

Part # 711000

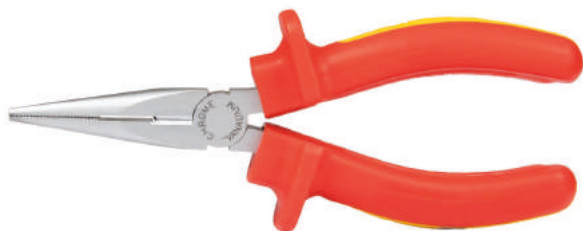

6" Long Nose Pliers **NEW**

- Insulated to 1000V
- Ideal for use in tight spaces
- Chrome Vanadium
- Length: 6" (15.2 cm)


Part # 710010



7" Combination Pliers **NEW**

- Insulated to 1000V
- Combines both gripping jaws and wire cutter
- Chrome Vanadium
- Length: 7" (17.8 cm)

Part # 710020

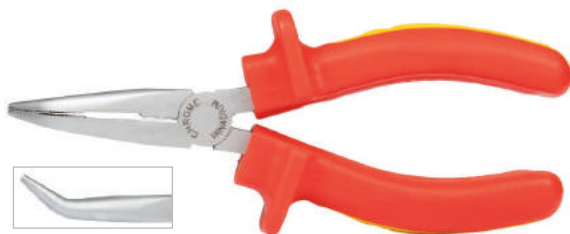

6" Bent Nose Pliers **NEW**

- Insulated to 1000V
- Ideal for use in tight spaces
- Chrome Vanadium
- Length: 6" (15.2 cm)

Part # 710030



6" Diagonal Cutting Pliers **NEW**

- Insulated to 1000V
- Ergonomic cutter for wire or cable ties
- Chrome Vanadium
- Length: 6" (15.2 cm)

Part # 710040

8 Function Digital Multimeter

- Auto ranging capability allows the meter to automatically determine the resolution based on the application
- Clear LCD display
- Lightweight, ergonomic design
- Comfortable protective cover, with test lead hanging groove
- Loud buzzer sound
- Batteries: two AAA Batteries (not included)
- Continuity ✓, Diode Test ✓

Specifications	Range	Accuracy
DC Voltage (V)	200.0mV, 2000mV/2.000V, 20.00V, 200.0V, 250V	200.0mV, 20.00V, 200.0V, 250V (0.7% + 3) 2000mV/2.000V (0.5% + 2)
AC Voltage (V)	200.0mV, 2000mV/2.000V, 20.00V, 200.0V, 250V	200.0mV, 20.00V (1.0% + 2) 2000mV/2.000V (0.7% + 3) 200.0V, 250V (1.2% + 3)
DC Current (A)	200.0μA, 2000μA, 20.00mA, 200.0mA, 2.000A, 10.00A	200.0μA, 2000μA, 20.00mA, 200.0mA (1.0% + 2) 2.000A, 10.00A (1.2% + 5)
AC Current (A)	200.0μA, 2000μA, 20.00mA, 200.0mA, 2.000A, 10.00A	200.0μA, 2000μA, 20.00mA, 200.0mA (1.2% + 3) 2.000A, 10.00A (1.5% + 5)
Resistance (Ω)	200.0 2000/2.000k, 20.00k, 200.0k, 20.00M, 200.0M	200 (1.0% + 2) 2000/2.000k, 20.00k, 200.0k (0.8% + 2) 20.00M (1.2% + 3) 200.0M (5.0% + 10)
Capacitance (F)	2.000nF, 20.00nF, 200.0nF, 2.000μF, 20.00μF, 200.0μF, 2.000mF	2.000nF (REL Mode: 5.0% + 5) 20.00nF, 200.0nF, 2.000μF, 20.00μF, 200.0μF (4.0% + 8), 2.000mF (10%)
Overload Protection	250V rms	
CAT Rating	CAT II 250V	

703072



5 YEAR WARRANTY



CAT II 250V



True RMS 12 Function Digital Multimeter

- Auto ranging capability allows the meter to automatically determine the resolution based on the application
- Clear LCD display
- Comfortable protective cover, with test lead hanging groove
- High voltage warning
- Auto power off functionality to save battery life
- Batteries: two AAA Batteries (not included)
- Continuity ✓, Diode Test ✓, NCV ✓

Specifications	Range	Accuracy
DC Voltage (V)	600.0mV, 6000mV/6.000V, 60.00V, 600.0V	600.0mV, 60.00V, 600.0V (0.7% + 3) 6000mV/6.000V (0.5% + 2)
AC Voltage (V)	600.0mV, 6000mV/6.000V, 60.00V, 600.0V	600.0mV, 60.00V (1.0% + 2) 6000mV/6.000V (0.7% + 3) 600.0V (1.2% + 3)
DC Current (A)	600.0μA, 6000μA, 60.00mA, 600.0mA, 6.000A, 10.00A	600.0μA, 6000μA, 60.00mA, 600.0mA (1.0% + 3) 6.000A, 10.00A (1.2% + 5)
AC Current (A)	600.0μA, 6000μA, 60.00mA, 600.0mA, 6.000A, 10.00A	600μA, 6000μA, 60.00mA, 600.0mA (1.2% + 3) 6.000A, 10.00A (1.5% + 5)
Resistance (Ω)	600.0, 6000/6.000k, 60.00k, 600.0k, 60.00M	600 (1.0% + 2) 6000/6.000k, 60.00k, 600.0k (0.8% + 2) 60.00M (2.0% + 5)
Capacitance (F)	9.999nF, 99.99nF, 999.9nF, 9.999μF, 99.99μF, 999.9μF, 9.999mF	9.999nF (REL Mode: 4.0% + 10) 99.99nF, 999.9nF, 9.999μF, 99.99μF, 999.9μF (4.0% + 5), 9.999mF (10%)
Frequency (Hz)	10.00Hz–1.000MHz	10.00Hz–1.000MHz (0.1% + 5)
Temperature (°F)	-40°F to 1832°F	-40 to 104°F (5%) 104°F to 932°F (1.5% + 5) 932°F to 1832°F (2.5% + 5)
Temperature (°C)	-40°C to 1000°C	-40 to 40°C (4°C) 40°C to 500°C (1.0% + 4) 500°C to 1000°C (2.0% + 4)
Overload Protection	600V rms	
CAT Rating	CAT III 600V	

703073



5 YEAR WARRANTY



CAT III 600V



True RMS 12 Function Digital Snap-Around Meter

- Easy to read backlit OLED screen
- Non-contact AC voltage testing
- Provides accurate readings for both pure sine wave and modified sine wave electrical circuits
- Zeroing function
- Flashlight for use in dark compartments
- Includes convenient carrying case
- Batteries: three AAA Batteries (not included)
- Continuity ✓, Diode Test ✓, NCV ✓

Specifications	Range	Accuracy
DC Voltage (V)	600.0mV, 6000mV, 6.000V, 60.00V, 600.0V, 1000V	600.0mV (1.0% + 8) 6000mV/6.000V (0.8% + 1) 60V, 600V (0.8% + 3) 1000V (1.0% + 3)
AC Voltage (V)	6.000V, 60.00V, 600.0V, 750V	6.000V, 60.00V, 600.0V (1.2% + 5) 750V (1.5% + 5)
DC Current (A)	60.00A, 600.0A	60.00A, 600.0A (2.5% + 5)
AC Current (A)	60.00A, 600.0A	60.00A, 600.0A (2.5% + 5)
Resistance (Ω)	600.0, 6000/6.000k, 60.00k, 600.0k, 6.000M, 60.00M	600.0, 6.000M (1.2% + 2) 6000/6.000k, 60.00k, 600.0k (1.0% + 2) 60.00M (1.5% + 5)
Capacitance (F)	60.00nF, 600.0nF, 6.000μF, 60.00μF, 600.0μF, 6.000mF	60.00nF (4.0% + 25) 600.0nF, 6.000μF, 60.00μF, 600.0μF (4.0% + 5) 6.000mF (10%)
Frequency (Hz)	10.00Hz–1.000MHz	10.00Hz–1.000MHz (0.1% + 4)
Temperature (°F)	-40°F to 1832°F	-40°F to 104°F (3.0% + 10) 104°F to 752°F (3.0% + 10) 752°F to 1832°F (2.0% + 10)
Temperature (°C)	-40°C to 1000°C	-40°C to 40°C (3.0% + 5) 40°C to 400°C (3.0% + 5) 400°C to 1000°C (2.0% + 5)
Overload Protection	1000V DC, 750V AC	
CAT Rating	CAT II 1000V, CAT III 600V	

703079



5 YEAR WARRANTY



TECH TIP

Measuring AC Current

Typically, a standard multimeter is accurate and reliable when measuring DC current. However, the same cannot be said for AC current. This is because AC current travels in the shape of a true or modified sine wave. When current is non-linear, you'll need a meter that can measure the current with the highest level of accuracy. This is achievable through Root Mean Square (RMS). True RMS is an advanced calculation used by digital multimeters which provides accurate values of AC levels. It doesn't matter if the current is distorted. A true RMS multimeter adjusts itself accordingly to deliver accurate results.



LIGHTING


Bayonet Base

60



Index Base

60



Mini Halogen

61



Festoon

61



Marine grade bulbs and lamps are available for a variety of applications. Each light bulb is constructed with a heavy-duty glass envelope to resist breakage, a nickel-plated brass base to prevent corrosion and has been tested to ensure durability and dependability.



LIGHTING

Screw Base

62



Fluorescent Tubes

62




Proper lighting is necessary for safety and operational activities aboard vessels and creates a soothing and functional atmosphere.










Incandescent Bulbs

Drawings are Actual Size

Single Contact Bayonet



Double Contact Bayonet

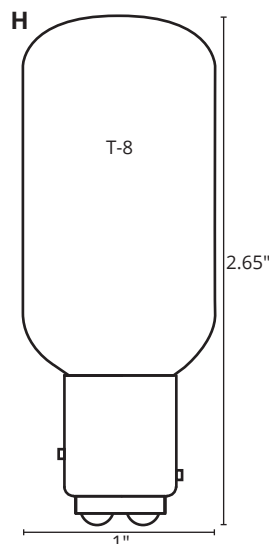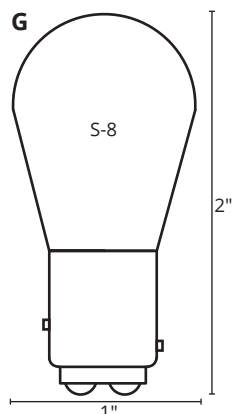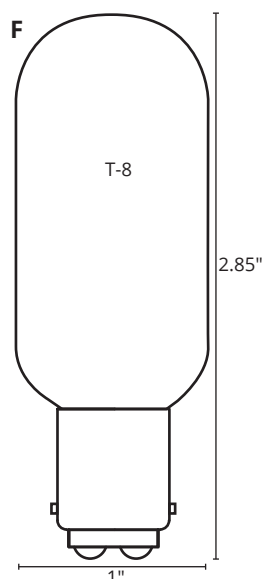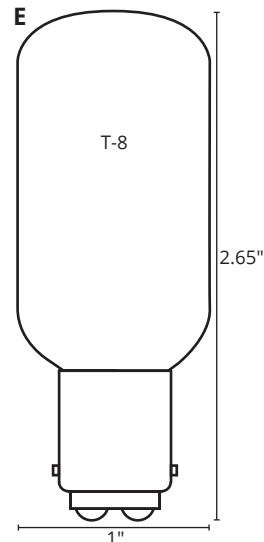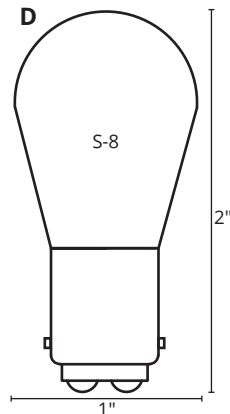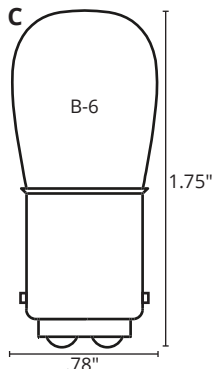

Double Contact Bayonet

Index Base Bulbs

Wedge Base Bulbs

Figure Letter	Trade #	Contact	System Volts	Design Volts	Design Amps	Design Watts	CP	Life	Qty/Pkg	Dimensions	Part #
Bayonet											
A	97	Single	12	13.50	.69	9.30	4.00	5,000	2	.75" x 1.44"	520097
B	90	Double	12	13.00	.58	7.50	6.00	750	2	.75" x 1.37"	520090
C	1004	Double	12	12.80	.94	12.00	15.00	200	2	.78" x 1.75"	521004
D	1142	Double	12	12.80	1.44	18.40	21.00	1,000	2	1" x 2"	521142
E		Double	12	2.50	30.00	26.00	1200	2,500	1	1" x 2.65"	529300
F		Double	120	120.00	.25	30.00	20.00	2,500	1	1" x 2.85"	521164
Index Base Bulbs											
G	1157	Double	12	12.8/14	2.1/59	27/8	32/3	200/5,000	2	1" x 2"	521157
		Double	12	12.00	2.08	25.00	24.00	1,200	1	1" x 2.65"	529340
H		Double	12	13.50	.83	10.00	12.00	1,000	1	1" x 2.65"	521158
		Double	24	24.00	1.04	25.00	24.00	1,200	1	1" x 2.65"	529341
Wedge Base Bulbs											
J	194	Wedge	12	14.00	.27	3.80	2.00	1,500	2	.4" x 1.06"	520194
K	906	Wedge	12	13.00	.69	9.00	6.00	1,000	2	.62" x 1.38"	520906

Miniature Halogen Bulbs

Drawings are Actual Size

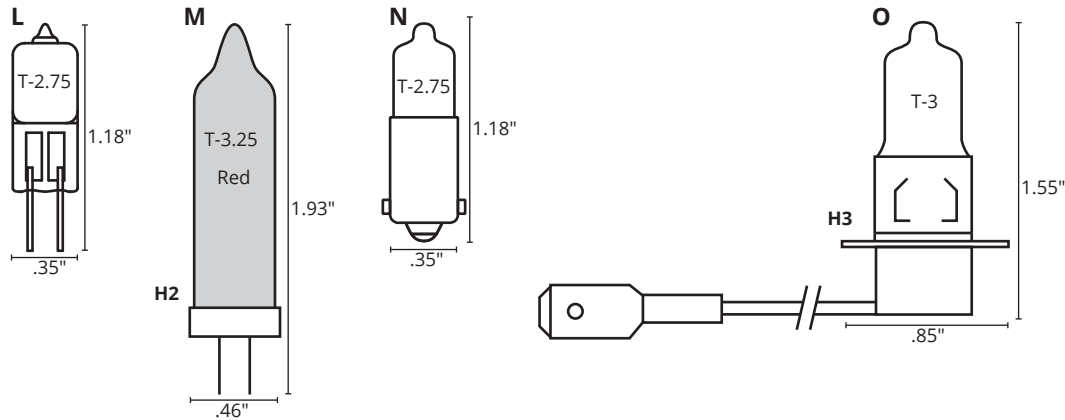


Figure Letter	System Volts	Design Volts	Design Amps	Design Watts	CP	Life	Qty/Pkg	Dimensions	Part #
L	12	12.00	.42	5	5.00	2,000	2	.35" x 1.18"	529361
	12	12.00	.83	10	11.00	2,000	1	.35" x 1.18"	529362
	24	24.00	.42	10	11.00	2,000	1	.35" x 1.18"	529338
	24	24.00	.83	20	20.00	2,000	1	.35" x 1.18"	529368
	12	12.00	.83	10	11.00	1,000	2	.35" x 1.18"	529370
M	12	12.00	.83	10	11.00	2,000	2	.46" x 1.93"	529385
N	12	12.00	1.67	20	20.00	2,000	1	.35" x 1.18"	529337
	12	12.00	.42	5	5.00	2,000	1	.35" x 1.18"	529355
O	12	13.50	8.30	100	100.00	100	1	.85" x 1.55"	529386

Festoon Bulbs

Drawings are Actual Size


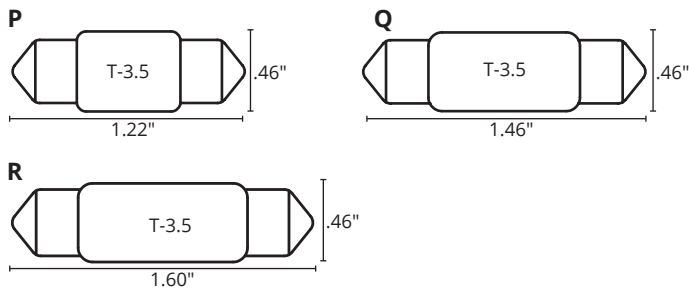


Figure Letter	Trade #	System Volts	Design Volts	Design Amps	Design Watts	CP	Life	Qty/Pkg	Dimensions	Part #
P	—	12	13.50	.83	10.00	8.00	1,000	2	.46" x 1.22"	529102
	—	24	24.00	.41	10.00	8.00	1,000	2	.46" x 1.22"	522129
Q	—	12	13.50	.50	6.00	2.00	1,000	2	.46" x 1.46"	529095
R	211-2	12	12.80	.97	15.00	12.00	1,000	2	.46" x 1.60"	522112
	212-2	12	13.50	.74	10.00	6.00	2,000	2	.46" x 1.60"	522122

Medium Screw Base Bulbs

Drawings are Actual Size


Figure Letter	Trade #	System Volts	Design Volts	Design Amps	Design Watts	Life	Qty/ Pkg	Dimensions	Part #
T	25A17/12	12	13.50	2.08	25	1000	2	2.34" x 4.2"	531025
	50A17/12	12	13.50	4.17	50	1000	2	2.34" x 4.2"	531050
	75A17/12	12	13.50	6.25	75	1000	2	2.34" x 4.2"	531075
	25A17/24	24	27.00	1.04	25	1000	2	2.34" x 4.2"	532025
	25A17/24	24	27.00	1.04	50	1000	2	2.34" x 4.2"	532050
	50A17/34	32	36.00	1.47	50	1000	2	2.34" x 4.2"	533050

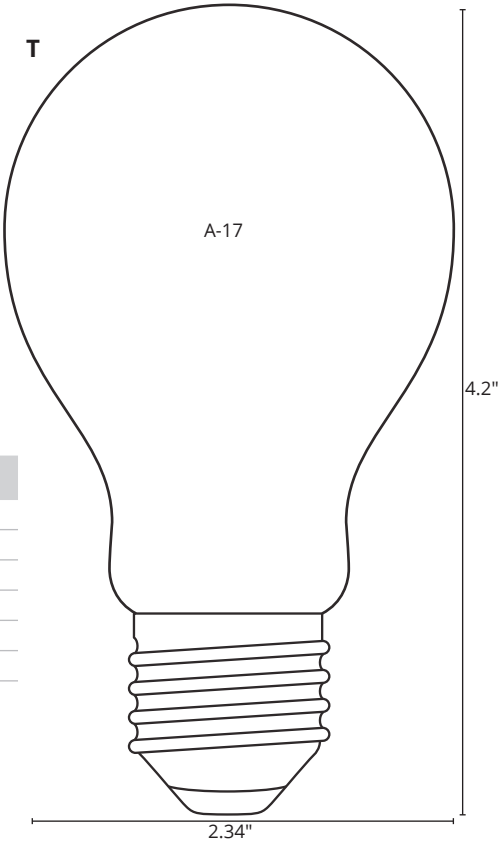

Fluorescent Tubes


Drawings are Actual Size

Figure Letter	Trade #	Volts	Watts	M.O.L.	M.O.D.	Life	Qty/ Pkg	Dimensions	Part #
U	F8T5/CW	13.5	8	11.3"	.5"	7500	2	.5" x 11.63"	529405

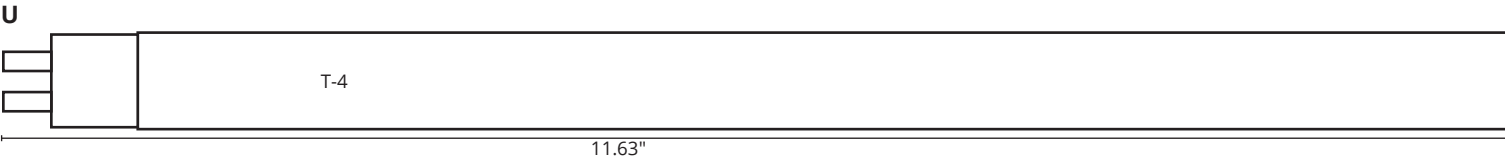



Actual Size



DISPLAYS

Heat Shrink Terminal, Connector & Tubing Displays



66

Ancor's most popular consumer packages of adhesive lined heat shrink tubing, heat shrink terminals, and butt connectors.

Nylon Connectors & Terminals Displays




66

A selection of our most popular nylon butt connectors, disconnects and ring terminals to fit wire sizes from 22 to 10 AWG.

DISPLAYS

Marine Grade® Tinned Wire Displays



67

This compact counter top display consists of 60 spools of the 12 most common wire sizes and colors. All wire is Premium UL 1426 Tinned Copper Primary Wire.

Tinned Copper Lug Displays



67

24 sizes of heavy-duty tinned copper lugs, 8 AWG to 4/0. Includes combo packs, battery terminals, and heavy-duty lug crimper.

NMEA 2000 Display



68

Simple drop in NMEA 2000 store set. Kit includes everything needed to build a new NMEA network or expand on an existing network.

Ancor product displays can quickly and effectively increase sales by providing an assortment of products to customers in an easy to shop layout



Heat Shrink Terminal, Connector & Tubing Display

Part # DR2230

Part #	Description	Qty/ Pkg	# of Pkgs
309003	22-18 AWG Heat Shrink Butt	3	3
309103	16-14 AWG Heat Shrink Butt	3	3
309125	16-14 AWG Heat Shrink Butt	25	3
309203	12-10 AWG Heat Shrink Butt	3	3
300000	22-10 AWG Heat Shrink Butt	10	3
310203	22-18 #8 Heat Shrink Ring	3	3
310303	22-18 #10 Heat Shrink Ring	3	3
320003	24-22/24-18 Step-Down, Heat Shrink Butt	3	3
320103	22-18/22-14 Step-Down, Heat Shrink Butt	3	3
320203	16-14/16-10 Step-Down, Heat Shrink Butt	3	3
320303	12-10/12-8 Step-Down, Heat Shrink Butt	3	3
311203	16-14 #8 Heat Shrink Ring	3	3
311303	16-14 #10 Heat Shrink Ring	3	3
311503	16-14 5/16" Heat Shrink Ring	3	3
311603	16-14 3/8" Heat Shrink Ring	3	3
SPK2218	22-18 AWG Heat Shrink, Speaker Connector Kit	6	3
SPK1614	16-14 AWG Heat Shrink, Speaker Connector Kit	6	3
312203	12-10 #8 Heat Shrink Ring	3	3
312303	12-10 #10 Heat Shrink Ring	3	3
312503	12-10 5/16" Heat Shrink Ring	3	3
312603	12-10 3/8" Heat Shrink Ring	3	3
304503	3/8" x 3" Heat Shrink Tubing Assortment	5	3
301103	1/8" x 3" Heat Shrink Tubing, Black	3	3
302103	3/16" x 3" Heat Shrink Tubing, Black	3	3
303103	1/4" x 3" Heat Shrink Tubing, Black	3	3
304103	3/8" x 3" Heat Shrink Tubing, Black	3	3
305103	1/2" x 3" Heat Shrink Tubing, Black	3	3
306103	3/4" x 3" Heat Shrink Tubing, Black	3	3
301503	3/16"-3/4" x 3" Heat Shrink Tubing Asst, Black	8	3



Nylon Connectors & Terminals Display

Part # DR2243

Part #	Description	Qty/ Pkg	# of Pkgs
230100	22-18 Nylon Butt	7	5
230110	16-14 Nylon Butt	7	5
230120	12-10 Nylon Butt	5	5
230202	22-18 #8 Nylon Ring	6	5
230203	22-18 #10 Nylon Ring	6	5
230212	16-14 #8 Nylon Ring	6	5
230213	16-14 #10 Nylon Ring	6	5
230215	16-14 5/16" Nylon Ring	5	5
230216	16-14 3/8" Nylon Ring	5	5
230222	12-10 #8 Nylon Ring	5	5
230223	12-10 #10 Nylon Ring	5	5
230224	12-10 1/4" Nylon Ring	4	5
230225	12-10 5/16" Nylon Ring	4	5
230226	12-10 3/8" Nylon Ring	4	5
230235	#8 5/16" Nylon Ring	2	5
230236	#8 3/8" Nylon Ring	2	5
230302	22-18 #8 Nylon Flanged Spade	6	5
230312	16-14 #8 Nylon Flanged Spade	6	5
230313	16-14 #10 Nylon Flanged Spade	6	5
230322	12-10 #8 Nylon Flanged Spade	5	5
230323	12-10 #10 Nylon Flanged Spade	5	5
230615	18-14 Splice Connector	4	5
230510	16-14 Nylon 3-Way Connector	1	5
230520	12-10 Nylon 3-Way Connector	1	5
230818	16-14 Nylon Disconnect, Female	5	5
231418	16-14 Nylon Fully Insulated Disconnect, Female	4	5
231419	16-14 Nylon Fully Insulated Disconnect, Male	4	5
230828	12-10 Nylon Disconnect, Female	4	5
231428	12-10 Nylon Fully Insulated Disconnect, Female	3	5
231429	12-10 Nylon Fully Insulated Disconnect, Male	3	5
230719	16-14 Nylon Snap Plug, Female	4	5
230718	16-14 Nylon Snap Plug, Male	4	5

All displays come with matching header, hooks, planogram and re-order tags.



Tinned Copper Lug Display

Part # DR2425

Part #	Description	Qty/ Pkg	# of Pkgs
252233	#8 #10 Tinned Lug	2	2
252234	#8 1/4" Tinned Lug	2	2
252235	#8 5/16" Tinned Lug	2	2
252236	#8 3/8" Tinned Lug	2	2
252243	#6 #10 Tinned Lug	2	2
252244	#6 1/4" Tinned Lug	2	2
252245	#6 5/16" Tinned Lug	2	2
252246	#6 3/8" Tinned Lug	2	2
252254	#4 1/4" Tinned Lug	2	2
252255	#4 5/16" Tinned Lug	2	2
252256	#4 3/8" Tinned Lug	2	2
252265	#2 5/16" Tinned Lug	2	2
252266	#2 3/8" Tinned Lug	2	2
252275	#1 5/16" Tinned Lug	2	2
252276	#1 3/8" Tinned Lug	2	2
252285	#1/0 5/16" Tinned Lug	2	2
252286	#1/0 3/8" Tinned Lug	2	2
252295	#2/0 5/16" Tinned Lug	2	2
252296	#2/0 3/8" Tinned Lug	2	2
252726	#4/0 3/8" Tinned Lug	1/1	2
252241	#6 5/16" & 3/8" Combo Pack	1/1	2
252251	#4 5/16" & 3/8" Combo Pack	1/1	2
252261	#2 5/16" & 3/8" Combo Pack	1/1	2
260325	Battery Terminal, Wing Nut, 5/16" & 3/8" Combo	1/1	2



Marine Grade® Tinned Wire Display

Part # DR1218

Part #	Description	# of Pkgs
180003	35' 18 AWG (0.8mm ²), Black	4
180803	35' 18 AWG (0.8mm ²), Red	4
182003	25' 16 AWG (1mm ²), Black	8
182803	25' 16 AWG (1mm ²), Red	8
182303	25' 16 AWG (1mm ²), Green	4
182903	25' 16 AWG (1mm ²), White	4
184003	18' 14 AWG (2mm ²), Black	4
184803	18' 14 AWG (2mm ²), Red	8
184303	18' 14 AWG (2mm ²), Green	4
184903	18' 14 AWG (2mm ²), White	4
186003	12' 12 AWG (3mm ²), Black	4
186803	12' 12 AWG (3mm ²), Red	4

Part # DR2218

Part #	Description	# of Pkgs
180003	35' 18 AWG (0.8mm ²), Black	2
180803	35' 18 AWG (0.8mm ²), Red	2
182003	25' 16 AWG (1mm ²), Black	2
182803	25' 16 AWG (1mm ²), Red	2
182303	25' 16 AWG (1mm ²), Green	2
182903	25' 16 AWG (1mm ²), White	2
184003	18' 14 AWG (2mm ²), Black	2
184803	18' 14 AWG (2mm ²), Red	2
184303	18' 14 AWG (2mm ²), Green	2
184903	18' 14 AWG (2mm ²), White	2
186003	12' 12 AWG (3mm ²), Black	2
186803	12' 12 AWG (3mm ²), Red	2

All displays come with matching header, hooks, planogram and re-order tags.



NMEA 2000 Planogram Assortment


Part # 270400

Simple drop in NMEA 2000 store set. Kit includes everything needed to build a new NMEA network or expand on an existing network.

Part #	Description	# of Pkgs
270000	NMEA 2000 Power Cable With Tee - 1m	1
270010	NMEA 2000 Backbone Cable - 10m	1
270101	NMEA 2000 Single Tee Connector	1
270105	NMEA 2000 Female Terminator	1
270106	NMEA 2000 Male Terminator	1
270109	NMEA 2000 Field Servicable Connector, Female	1
270110	NMEA 2000 Field Servicable Connector, Male	1
270201	NMEA 2000 Single Device Starter Kit	1
270301	NMEA 2000 Drop Cable - 1 Meter	1
270305	NMEA 2000 Drop Cable - 5 Meter	1

All displays come with matching header, hooks, planogram and re-order tags.

Countertop Display Replacement Headers

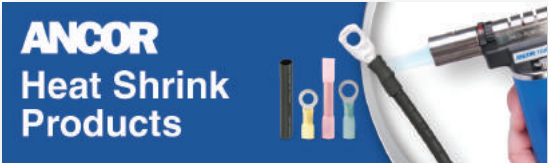


Part # ANCSHRINK



Part # ANCTERM



Part # ANCLAMP

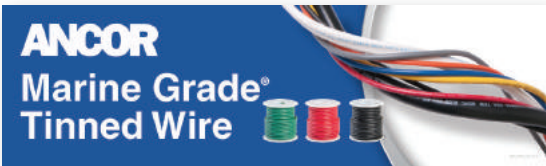

Part # ANCWIRE



Part # ANCLUG



Part # ANCNMEA

Wire & Cable Technical Data

Using the wrong type of wire can cost you more in the long run. Insist on Marine Grade® Boat Cable by Ancor. It is UL approved for the corrosive marine environment and charter boat service. Marine Grade Boat Cable is specially designed to exceed all test standards for cold bend, moisture and oil resistance, heat shock and flammability. This ensures the safest, easiest to install, longest lasting and ultimately the least expensive electrical system you can buy. Only Ancor offers a complete line of Marine Grade Boat Cable for every need.

"Can I use 'regular wire' for my boat?" The answer to this common question is a qualified "yes." However, caution is advised and the installer must understand the circumstances in which SAE (Society of Automotive Engineering) J378, J1127 or J1128 wire can, and can not be used. Keep in mind that these wires are designed for "surface vehicles," not for the special

requirements of the marine industry. Even if tinned copper, they should not be run in bilge spaces or other areas subject to moisture from spray or dripping. They should not be run in engines spaces, unless marked "oil resistant" and "75°C". They should not be used in applications where subjected to vibration or frequent flexing and must never be used for 110 volt applications. For safety, use only wire which is marked with size, type and temperature rating.

Most importantly, SAE wire is up to 12% smaller than AWG Boat Cable which means that, in many applications, larger gauge wire must be used to stay within the voltage drop limits recommended by experts. The wire charts found in "Chapman's Piloting" and other publications are all for "AWG" wire like Ancor, not "SAE" type wire.

ABYC Recommended Usages

Color	Item	Use
Red	DC Positive Conductor	Positive Mains
Black or Yellow	DC Negative Conductor	Return, Negative Mains
Green or Green w/ Yellow Stripe	DC Grounding Conductor	Bonding System Bonding Wires (if insulated)
Light Blue	Oil Pressure	Oil Pressure Sender to Gauge
Dark Blue	Cabin & Instrument Lights	Fuse or Switch to Lights
	Generator Armature	Generator Armature to Regulator
Brown	Alternator Charge Light	Generator Terminal/Alternator Auxiliary Terminal to Light to Regulator
	Pumps	Fuse or Switch to Pumps
Grey	Navigation Lights	Fuse or Switch to Lights
	Tachometer	Tachometer Sender to Gauge
Orange	Accessory Feed	Ammeter to Alternator or Generator Output and Accessory Fuses or Switches
	Common Feed	Distribution Panel to Accessory Switch
Pink	Fuel Gauge	Fuel Gauge Sender to Gauge
Purple	Ignition	Ignition Switch to Coil & Electrical Instruments
	Instrument Feed	Distribution Panel to Electric Instruments
Brown w/ Yellow Stripe	Bilge Blowers	Fuse or Switch to Blower
Yellow w/ Red Stripe	Starting Circuit	Starting Switch to Solenoid
Tan	Water Temperature	Water Temperature Sender to Gauge
Green/Stripe (G/x) (except G/Y)	Tilt Down and/or Trim In	Tilt and/or Trim Circuits
Blue/Stripe (Bl/x)	Tilt Up and/or Trim Out	Tilt and/or Trim Circuits

Conductors Sized (AWG) for 3% Voltage Drop

3% Voltage Drop at 12 Volts

Use 3% voltage drop for any "critical application" affecting the safety of the vessel or its passengers: bilge pumps, navigation lights, electronics, etc....

Length (feet): Determined by measuring the length of the conductor from the positive (+) power source connection to the electrical device and back to the negative (-) power source connection. Note that the power source connection may be either the battery, panelboard or switchboard.

Current (amps): Determined by adding the total amps on a circuit.

Conductor sizes not covered in the following tables may be calculated by using the following formula:

$$CM = \frac{K \times I \times L}{E}$$

After calculating the Circular Mil Area (CM), use the temperature rating chart to determine the proper conductor size (National Fire Protection Agency and Coast Guard require that the next larger conductor be used when the calculated CM area falls between the two conductor sizes).

CM = Circular Mil Area of Conductors

K = 10.75 (Constant representing the mil-foot resistance of copper)

I = Current - amps

L = Length - feet

E = Voltage drop at load
(drop x working voltage)

TECH TIP

ABYC Recommends...

"Conductors used for panelboard or switchboard main feeders, bilge blowers, electronic equipment, navigation lights, and other circuits where voltage drop must be kept to a minimum, shall be sized for a voltage drop not to exceed three percent."
ABYC 11.16.1.2.7.

		Current (Amps)												
Length		5	10	15	20	25	30	40	50	60	70	80	90	100
10'	3 m	18	14	12	10	10	8	6	6	6	6	6	4	4
15'	5 m	16	12	10	10	8	8	6	6	4	4	4	2	2
20'	6 m	14	10	10	8	6	6	6	4	4	2	2	2	2
25'	8 m	12	10	8	6	6	6	4	4	2	2	2	1	1
30'	9 m	12	10	8	6	4	4	4	2	2	2	2	1	1
40'	12 m	10	8	6	6	4	4	2	2	1	1/0	1/0	2/0	2/0
50'	15 m	10	6	6	4	4	2	2	1	1/0	2/0	3/0	4/0	4/0
60'	18 m	10	6	6	4	2	2	1	1/0	2/0	3/0	3/0	4/0	4/0
70'	21 m	8	6	4	2	2	1	1/0	2/0	3/0	3/0	4/0	4/0	
80'	24 m	8	6	4	2	2	1	1/0	2/0	3/0	4/0	4/0		
90'	27 m	8	4	2	2	1	1/0	2/0	3/0	4/0	4/0			
100'	30 m	6	4	2	2	1	1/0	2/0	3/0	4/0				
110'	33 m	6	4	2	2	1	1/0	2/0	3/0	4/0				
120'	36 m	6	4	2	1	1/0	2/0	3/0	4/0					
130'	40 m	6	2	2	1	1/0	2/0	3/0	4/0					
140'	43 m	6	2	2	1/0	2/0	3/0	4/0						
150'	46 m	6	2	1	1/0	2/0	3/0	4/0						
160'	49 m	6	2	1	1/0	2/0	3/0	4/0						
170'	52 m	6	2	1	2/0	3/0	3/0	4/0						

3% Voltage Drop at 24 Volts

		Current (Amps)												
Length		5	10	15	20	25	30	40	50	60	70	80	90	100
10'	3 m	18	18	16	14	12	12	10	10	10	8	8	8	6
15'	5 m	18	16	14	12	12	10	10	8	8	6	6	6	6
20'	6 m	18	14	12	10	10	10	8	6	6	6	6	4	4
25'	8 m	16	12	12	10	10	8	6	6	6	4	4	4	4
30'	9 m	16	12	10	10	8	8	6	6	4	4	4	2	2
40'	12 m	14	10	10	8	6	6	6	4	4	2	2	2	2
50'	15 m	12	10	8	6	6	6	4	4	2	2	2	1	1
60'	18 m	12	10	8	6	6	4	4	2	2	1	1	1/0	1/0
70'	21 m	12	8	6	6	4	4	2	2	1	1	1/0	1/0	2/0
80'	24 m	10	8	6	6	4	4	2	2	1	1/0	1/0	2/0	2/0
90'	27 m	10	8	6	4	4	2	2	1	1/0	1/0	2/0	2/0	3/0
100'	30 m	10	6	6	4	4	2	2	1	1/0	2/0	2/0	3/0	3/0
110'	33 m	10	6	6	4	2	2	1	1/0	1/0	2/0	3/0	3/0	4/0
120'	36 m	10	6	4	4	2	2	1	1/0	2/0	3/0	3/0	4/0	4/0
130'	40 m	8	6	4	2	2	2	1	1/0	2/0	3/0	3/0	4/0	4/0
140'	43 m	8	6	4	2	2	1	1/0	2/0	3/0	3/0	4/0	4/0	
150'	46 m	8	6	4	2	2	1	1/0	2/0	3/0	3/0	4/0	4/0	
160'	49 m	8	6	4	2	2	1	1/0	2/0	3/0	4/0	4/0	4/0	
170'	52 m	8	6	2	2	1	1	2/0	3/0	3/0	4/0	4/0		

3% Voltage Drop at 32 Volts

		Current (Amps)												
Length		5	10	15	20	25	30	40	50	60	70	80	90	100
10'	3 m	18	18	16	16	14	14	12	12	10	10	10	8	8
15'	5 m	18	16	14	14	12	12	10	10	8	8	8	6	6
20'	6 m	18	16	12	12	12	10	10	8	8	6	6	6	6
25'	8 m	18	14	12	12	10	10	8	8	6	6	6	6	4
30'	9 m	16	14	10	10	10	8	8	6	6	6	4	4	4
40'	12 m	16	12	10	10	8	8	6	6	4	4	4	2	2
50'	15 m	14	12	8	8	8	6	6	4	4	2	2	2	2
60'	18 m	14	10	8	8	6	6	4	4	2	2	2	2	1
70'	21 m	12	10	6	6	6	6	4	2	2	2	1	1	0
80'	24 m	12	10	6	6	6	4	4	2	2	1	1	0	0
90'	27 m	12	8	6	6	6	4	2	2	2	1	1/0	1/0	2/0
100'	30 m	12	8	6	6	4	4	2	2	1	1/0	1/0	2/0	2/0
110'	33 m	10	8	6	6	4	4	2	2	1	1/0	1/0	2/0	2/0
120'	36 m	10	8	6	4	4	2	2	1	1/0	1/0	2/0	2/0	3/0
130'	40 m	10	8	6	4	4	2	2	1	1/0	2/0	2/0	3/0	3/0
140'	43 m	10	6	6	4	2	2	1	1/0	1/0	2/0	3/0	3/0	3/0
150'	46 m	10	6	6	4	2	1	1	1/0	2/0	2/0	3/0	3/0	4/0
160'	49 m	10	6	4	4	2	1	1	1/0	2/0	3/0	3/0	4/0	4/0
170'	52 m	8	6	4	2	2	1	1	1/0	2/0	3/0	3/0	4/0	4/0

Conductors Sized (AWG) for 10% Voltage Drop

10% Voltage Drop at 12 Volts

Use 10% voltage drop for any "non-critical" applications: windlass, cabin lights, etc....

For Example...

Q: A bilge pump draws 10 amps. The positive run is 11 feet from the power panel, including the float switch. The negative run is only 10 feet. What size is the wire?

A: Use the formula to reach the correct answer:

$$CM = \frac{10.75 \times 10 \text{ (amps)} \times 21 \text{ (total length of run)}}{0.36 \text{ (3\% of 12V)}} = 6.271$$

Ancor cable specifications show that 12 AWG wire has a CM area of 6,500 and is the correct choice. However, SAE wire has a CM area of only 5,833. Under NFPA and USCG regulations, 10 SAE wire must be used.

TECH TIP

ABYC Recommends...

"Conductors used for lighting, other than navigation lights, and other circuits where voltage drop is not critical, shall be sized for a voltage drop not to exceed 10 percent." ABYC 11.16.1.2.7.

		Current (Amps)												
Length		5	10	15	20	25	30	40	50	60	70	80	90	100
10'	3 m	18	18	18	16	16	14	14	12	12	10	10	10	10
15'	5 m	18	18	16	14	14	12	12	10	10	8	8	8	8
20'	6 m	18	16	14	14	12	12	10	10	8	8	8	6	6
25'	8 m	18	16	14	12	12	10	10	8	8	6	6	6	6
30'	9 m	18	14	12	12	10	10	8	8	6	6	6	6	4
40'	12 m	16	14	12	10	10	8	8	6	6	6	4	4	4
50'	15 m	16	12	10	10	8	8	6	6	4	4	4	2	2
60'	18 m	14	12	10	8	8	6	6	4	4	2	2	2	2
70'	21 m	14	10	8	8	6	6	6	4	2	2	2	2	1
80'	24 m	14	10	8	8	6	6	4	4	2	2	2	1	1
90'	27 m	12	10	8	6	6	6	4	2	2	2	1	1	1/0
100'	30 m	12	10	8	6	6	4	4	2	2	1	1	1/0	1/0
110'	33 m	12	8	8	6	6	4	2	2	2	1	1/0	1/0	1/0
120'	36 m	12	8	6	6	4	4	2	2	1	1	1/0	1/0	2/0
130'	40 m	12	8	6	6	4	4	2	2	1	1/0	1/0	2/0	2/0
140'	43 m	10	8	6	6	4	2	2	1	1	1/0	2/0	2/0	2/0
150'	46 m	10	8	6	4	4	2	2	1	1/0	1/0	2/0	2/0	3/0
160'	49 m	10	8	6	4	4	2	2	1	1/0	2/0	2/0	3/0	3/0
170'	52 m	10	6	6	4	2	2	2	1	1/0	2/0	2/0	3/0	3/0

10% Voltage Drop at 24 Volts

		Current (Amps)												
Length		5	10	15	20	25	30	40	50	60	70	80	90	100
10'	3 m	18	18	18	18	18	18	16	16	14	14	14	12	12
15'	5 m	18	18	18	18	16	16	14	14	12	12	12	10	10
20'	6 m	18	18	18	16	16	14	14	12	12	10	10	10	10
25'	8 m	18	18	16	16	14	14	12	12	10	10	10	8	8
30'	9 m	18	18	16	14	14	12	12	10	10	8	8	8	8
40'	12 m	18	16	14	14	12	12	10	10	8	8	8	6	6
50'	15 m	18	16	14	12	12	10	10	8	8	6	6	6	6
60'	18 m	18	14	12	12	10	10	8	8	6	6	6	6	4
70'	21 m	16	14	12	10	10	8	8	6	6	6	6	4	4
80'	24 m	16	14	12	10	10	8	8	6	6	6	4	4	4
90'	27 m	16	12	10	10	8	8	6	6	6	4	4	4	2
100'	30 m	16	12	10	10	8	8	6	6	4	4	4	2	2
110'	33 m	14	12	10	8	8	8	6	6	4	4	2	2	2
120'	36 m	14	12	10	8	8	6	6	4	4	2	2	2	2
130'	40 m	14	12	10	8	8	6	6	4	4	2	2	2	2
140'	43 m	14	10	8	8	6	6	6	4	2	2	2	2	1
150'	46 m	14	10	8	8	6	6	4	4	2	2	2	2	1
160'	49 m	14	10	8	8	6	6	4	4	2	2	2	1	1
170'	52 m	12	10	8	6	6	6	4	2	2	2	2	1	1

10% Voltage Drop at 32 Volts

		Current (Amps)												
Length		5	10	15	20	25	30	40	50	60	70	80	90	100
10'	3 m	18	18	18	18	18	18	18	16	16	14	14	14	14
15'	5 m	18	18	18	18	18	18	16	14	14	14	12	12	12
20'	6 m	18	18	18	18	16	16	14	14	12	12	12	10	10
25'	8 m	18	18	18	16	16	14	14	12	12	10	10	10	10
30'	9 m	18	18	18	16	14	14	12	14	10	10	10	10	8
40'	12 m	18	18	16	14	14	12	12	10	10	8	8	8	8
50'	15 m	18	16	14	14	12	12	10	10	8	8	8	6	6
60'	18 m	18	16	14	12	12	10	10	8	8	8	6	6	6
70'	21 m	18	14	14	12	10	10	8	8	8	6	6	6	6
80'	24 m	18	14	12	12	10	10	8	8	6	6	6	6	4
90'	27 m	18	14	12	10	10	10	8	6	6	6	6	4	4
100'	30 m	16	14	12	10	10	8	8	6	6	6	4	4	4
110'	33 m	16	14	12	10	10	8	8	6	6	6	4	4	4
120'	36 m	16	12	10	10	8	8	6	6	6	4	4	4	2
130'	40 m	16	12	10	10	8	8	6	6	6	4	4	2	2
140'	43 m	14	12	10	8	8	8	6	6	4	4	2	2	2
150'	46 m	14	12	10	8	8	6	6	6	4	4	2	2	2
160'	49 m	14	12	10	8	8	6	6	4	4	2	2	2	2
170'	52 m	14	12	10	8	8	6	6	4	4	2	2	2	2

18–4/0 AWG Wire and Cable Specifications

AWG	mm ²	AWG CM area	SAE CM area	Ampacity Engine Space	
				Outside	Inside
18	0.8	1,600	1,537	20	17
16	1	2,600	2,336	25	21
14	2	4,100	3,702	35	30
12	3	6,500	5,833	45	38
10	5	10,500	9,343	60	51
8	8	16,800	14,810	80	68
6	13	26,600	24,538	120	102
4	21	42,000	37,360	160	136
2	34	66,500	62,450	210	178
1	42	83,690	77,790	245	208
1/0	53	105,600	98,980	285	242
2/0	68	133,100	125,100	330	280
3/0	85	167,800	158,600	385	327
4/0	107	211,600	205,500	445	378

Temperature Rating of Conductor Insulation

The Law

The Code of Federal Regulations (CFR) 183.425 Conductors

(b) Except for intermittent surges each conductor must not carry a current greater than that specified for the conductor's gauge and temperature rating.

(c) For conductors in engine spaces, amperages must be corrected by the appropriate correction factor in Note 1.

Due to engine heat, the ambient temperature in engine spaces is usually higher than in other spaces of the boat. Wiring in and passing through engine spaces must be able to operate at these higher ambient temperatures. The ampacity values are based on an ambient temperature of 86°F / 30°C which is considered reasonable for use on boats except in engine spaces. The correction factors in Note 1 converts the ampacities to acceptable values in an ambient temperature of 122°F / 50°C. This higher temperature has been selected as satisfactory for engine spaces. Note 1 is supplied to eliminate the need for calculating the corrections. The values are already corrected.

Conductor Size AWG	Ampacity Outside of Engine Space	Ampacity Inside of Engine Space (Note 1)
18	20	17
16	25	21
14	35	30
12	45	38
10	60	51
8	80	68
6	120	102
4	160	136
3	180	153
2	210	178
1	245	208
1/0	285	242
2/0	330	280
3/0	385	327
4/0	445	378

*De-rating for engine space is 0.85 for 221°F / 105°C rated wire.

Allowable Amperage of Conductors of 50 Volts or More

The current values shown in this chart and also on the wire and cable specifications chart do not consider voltage drop for conductors under 50 volts. The values shown on the ampacity table are the maximum safe amperages which the conductor can carry on a continuous basis. They do not apply to intermittent starting loads such as motor start currents. Since all Ancor Boat Cable is 105°C insulated, only that temperature rating is shown.

Due to the higher ambient temperatures in engine spaces and the heat retention of large wire bundles, a “correction factor” must be used to de rate the wire by increasing conductor size. This chart takes into consideration these factors and should be used to select conductor sizes for circuits over 50 volts. Note that for electrical systems under 50 volts, voltage drop is the controlling factor and the tables on 70 and 71 should be used.

Conductor Size AWG	2 Conductors 221°F (105°C) Engine Space		3 Conductors 221°F (105°C) Engine Space		4–6 Conductors 221°F (105°C) Engine Space		7–24 Conductors 221°F (105°C) Engine Space	
	Outside	Inside	Outside	Inside	Outside	Inside	Outside	Inside
18	20	17.0	14.0	11.9	12.0	10.2	10.0	8.5
16	25	21.3	17.5	14.9	15.0	12.8	12.5	10.6
14	35	29.8	24.5	20.8	21.0	17.9	17.5	14.9
12	45	38.3	31.5	26.8	27.0	23.0	22.5	19.1
10	60	51.0	42.0	35.7	36.0	30.6	30.0	25.5
8	80	68.0	56.0	47.6	48.0	40.8	40.0	34.0
6	120	102.0	84.0	71.4	72.0	61.2	60.0	51.0
4	160	136.0	112.0	95.2	96.0	81.6	80.0	68.0
3	180	153.0	126.0	107.1	108.0	91.8	90.0	76.5
2	210	178.5	147.0	125.0	126.0	107.1	105.0	89.3
1	245	208.3	171.5	145.8	147.0	125.0	122.5	104.1
1/0	285	242.3	199.5	169.6	171.0	145.4	142.5	121.1
2/0	330	280.5	231.0	196.4	198.0	168.3	165.0	140.3
3/0	385	327.3	269.5	229.1	231.0	196.4	192.5	163.6
4/0	445	378.3	311.5	264.8	267.0	227.0	222.5	189.1

Number of current carrying conductors:	Correction Factor
3	0.70
4 to 6	0.60
7 to 24	0.50
25 and above	0.40

This table is supplied to eliminate the need for calculating the corrections for multi-conductor cable bundles in the temperature rating chart. The values are already corrected.

Note: These tables only apply for 221°F (105°C) wire and other premium wire and should not be used for lesser grades of wire and cable.

Reprinted at the courtesy of the United States Coast Guard Electrical System Compliance Guideline.

* There is NO LIMIT on conductors in a bundle under 50 volts.



Use the Circuit Wizard to easily identify what wire to use. Scan the code or go to ancorproducts.com/circuit_wizard

PN	Page	PN	Page	PN	Page	PN	Page	PN	Page
100010	10	102199	10	104425	10	106710	11	109302	11
100025	10	102210	10	104450	10	106725	11	109310	11
100050	10	102225	10	104499	10	106740	11	109325	11
100099	10	102250	10	104510	10	106802	11	109350	11
100110	10	102299	10	104525	10	106810	11	109399	11
100125	10	102310	10	104550	10	106825	11	111002	11
100150	10	102325AA	10	104599	10	106840	11	111005	11
100199	10	102350	10	104610	10	106899	11	111010	11
100210	10	102399	10	104625	10	106902	11	111025	11
100225	10	102410	10	104650	10	106910	11	111050	11
100250A	10	102425	10	104710	10	106925	11	111099	11
100299	10	102450	10	104725	10	106940	11	111302	11
100310	10	102499	10	104750	10	106999	11	111305	11
100319F	18	102510	10	104810	10	107002	11	111310	11
100320F	18	102525	10	104825	10	107010	11	111325	11
100325	10	102550	10	104850	10	107025	11	111350	11
100350	10	102599	10	104899	10	107040	11	111399	11
100399	10	102610	10	104910	10	107099	11	111502	11
100410	10	102625	10	104925	10	108002	11	111505	11
100425	10	102650	10	104950	10	108010	11	111510	11
100450	10	102710	10	104999	10	108025	11	111525	11
100499	10	102725	10	105010	10	108050	11	111550	11
100510	10	102750	10	105025	10	108099	11	111599	11
100525	10	102799	10	105050	10	108102	11	111702	11
100550	10	102810	10	105099	10	108110	11	111705	11
100599	10	102825	10	105810	11	108125	11	111710	11
100610	10	102850	10	105825	11	108150	11	111725	11
100625	10	102899	10	105840	11	108199	11	111750	11
100650	10	102910	10	106002	11	108202	11	111799	11
100699	10	102925	10	106010	11	108210	11	111902	11
100710	10	102950	10	106025	11	108225	11	111905	11
100725	10	102999	10	106040	11	108250	11	111910	11
100750	10	103010	10	106099	11	108299	11	111925	11
100799	10	103025	10	106102	11	108302	11	111950	11
100810	10	103050	10	106110	11	108310	11	111999	11
100825	10	103099	10	106125	11	108325	11	112002	11
100850	10	103810	10	106140	11	108350	11	112005	11
100899	10	103825	10	106199	11	108399	11	112010	11
100910	10	103850	10	106202	11	108499	11	112025	11
100925	10	103910	10	106210	11	108502	11	112050	11
100950	10	103925	10	106225	11	108510	11	112075	11
100999	10	103950	10	106240	11	108525	11	112302	11
101010	10	104010	10	106299	11	108550	11	112305	11
101025	10	104025	10	106302	11	108599	11	112310	11
101050	10	104050	10	106310	11	108802	11	112325	11
101099	10	104099	10	106325	11	108810	11	112350	11
101810	10	104110	10	106340	11	108825	11	112375	11
101825	10	104125	10	106399	11	108850	11	112502	11
101850	10	104150	10	106499	11	108899	11	112505	11
101910	10	104199	10	106502	11	108902	11	112510	11
101925	10	104210	10	106510	11	108910	11	112525	11
101950	10	104225	10	106525	11	108925	11	112550	11
102010	10	104250	10	106540	11	108950	11	112575	11
102025	10	104299	10	106599	11	108999	11	112702	11
102050	10	104310	10	106602	11	109002	11	112705	11
102099	10	104325	10	106610	11	109010	11	112710	11
102110	10	104350	10	106625	11	109025	11	112725	11
102125	10	104399	10	106640	11	109050	11	112750	11
102150	10	104410	10	106702	11	109099	11	112775	11

PN	Page	PN	Page	PN	Page	PN	Page	PN	Page
112902	11	116925	12	121799	14	131510	15	160110	17
112905	11	117002	12	121802	16	131525	15	160199	17
112910	11	117005	12	121810	16	131550	15	160210	17
112925	11	117010	12	121825	16	131590	15	160299	17
112950	11	117020	12	121910	14	131710	15	170002	17
112975	11	117502	12	121925	14	131725	15	170010	17
113002	12	117505	12	121950	14	131750	15	170025	17
113005	12	117510	12	122010	16	131799	15	180003	10
113010	12	117520	12	122025	16	133310	15	180103	10
113025	12	117902	12	122050	16	133325	15	180203	10
113050	12	117905	12	123705	14	133510	15	180303	10
113502	12	117910	12	123710	14	133525	15	180403	10
113505	12	117920	12	123905	14	133590	15	180503	10
113510	12	118002	12	123910	14	133710	15	180603	10
113525	12	118005	12	123950	14	133725	15	180703	10
113550	12	118010	12	124102	14	141410	16	180803	10
113902	12	118015	12	124110	14	141425	16	180903	10
113905	12	118502	12	124125	14	142410	17	181003	10
113910	12	118505	12	124140	14	142425	17	182003	10
113925	12	118510	12	124180	14	142499	17	182103	10
113950	12	118515	12	124302	14	142610	17	182203	10
114002	12	118902	12	124310	14	142625	17	182303	10
114005	12	118905	12	124325	14	142650	17	182403	10
114010	12	118910	12	124350	14	142810	17	182503	10
114025	12	118915	12	124502	14	150102	17	182603	10
114040	12	119002	12	124510	14	150110	17	182703	10
114502	12	119005	12	124525	14	150510	18	182803	10
114505	12	119010	12	124550	14	150525	18	182903	10
114510	12	119025	12	124599	14	151025	18	183003	10
114525	12	119502	12	124702	14	151050	18	184003	10
114540	12	119505	12	124710	14	151510	18	184103	10
114902	12	119510	12	124725	14	151525	18	184203	10
114905	12	119525	12	124750	14	151550	18	184303	10
114910	12	119902	12	124799	14	151560	18	184403	10
114925	12	119905	12	124910	14	151710	18	184503	10
114940	12	119910	12	124925	14	151725	18	184603	10
115002	12	119925	12	124950	14	151750	18	184703	10
115005	12	120705	14	124999	14	153010	16	184803	10
115010	12	120710	14	126310	14	153050	16	184903	10
115030	12	120905	14	126325	14	153110	16	185003	10
115502	12	120910	14	126350	14	153125	16	186003	11
115505	12	120925	14	126510	14	153150	16	186303	11
115510	12	121110	14	126525	14	153710	18	186803	11
115530	12	121125	14	126550	14	153725	18	186903	11
115902	12	121140	14	126710	14	154010	19	187003	11
115905	12	121180	14	126725	14	154030	19	188003	11
115910	12	121310	14	126750	14	154510	19	188803	11
115930	12	121325	14	130705	15	154525	19	189130	13
116002	12	121350	14	130710	15	155010	16	189131	13
116005	12	121510	14	130902	15	155050	16	189134	13
116010	12	121525	14	130905	15	156410	17	189135	13
116025	12	121550	14	130910	15	156425	17	189136	13
116502	12	121599	14	131110	15	156450	17	189137	13
116505	12	121602A	16	131130	15	156610	17	189140	13
116510	12	121610	16	131150	15	156625	17	189141	13
116525	12	121625	16	131302	15	158010	16	189144	13
116902	12	121710	14	131310	15	158025	16	189145	13
116905	12	121725	14	131325	15	160010	17	189146	13
116910	12	121750	14	131370	15	160099	17	189147	13

PN	Page
189303	16
189800	18
189849	18
199200	41
199201	41
199202	41
199203	41
199204	41
199205	41
199206	41
199207	41
199208	41
199209	41
199210	41
199211	41
199212	41
199213	41
199214	41
199215	41
199216	41
199217	41
199218	41
199219	41
199220	41
199221	41
199222	41
199223	41
199224	42
199225	42
199226	42
199227	42
199228	42
199229	42
199230	42
199231	42
199232	42
199233	42
199234	42
199235	42
199236	42
199245	42
199246	41
199247	41
199248	41
199249	41
199250	42
199251	42
199252	42
199253	42
199254	41
199257	42
199258	42
199259	41
199260	41
199261	42
199262	42
199263	42
199264	43
199265	43

PN	Page
199266	43
199267	43
199268	43
199269	43
199274	43
199275	43
199276	43
199277	43
199278	43
199279	43
199280	43
199281	43
199282	43
199283	43
199284	43
199285	43
199300	44
199301	44
199302	44
199303	44
199304	44
199305	44
199306	44
199307	44
199308	44
199309	44
199310	44
199311	44
199312	44
199313	44
199314	44
199315	44
199316	44
199317	44
199324	42
199325	42
199328	42
199329	42
199333	43
199334	43
199336	43
199337	43
199339	43
199340	43
199342	43
199343	43
199344	41
199345	41
199346	41
199347	41
199348	41
199349	41
199350	41
199351	41
199352	41
200258	32
200259	32
202175	32
202176	32

PN	Page
203100	32
210100	30
210110	30
210120	30
210130	31
210140	31
210150	31
210161	30
210162	30
210163	30
210164	31
210165	31
210166	31
210201	29
210202	29
210203	29
210204	29
210205	29
210206	29
210211	29
210212	29
210213	29
210214	29
210215	29
210216	29
210221	29
210222	29
210223	29
210224	29
210225	29
210226	29
210227	29
210233	29
210234	29
210235	29
210236	29
210237	29
210243	29
210244	29
210245	29
210246	29
210247	29
210301	30
210302	30
210303	30
210311	30
210312	30
210313	30
210322	30
210323	30
210510	31
210520	31
210602A	31
210612	31
210613	31
210622	31
210708	31
210709	31
210718	31

PN	Page
210719	31
210808	30
210809	30
210818	30
210819	30
210828	30
210829	30
211408	30
211409	30
211418	30
211419	30
211428	30
211429	30
211601	30
211611	30
211621	30
220003	47
220011	27
220012	27
220100	30
220110	30
220120	30
220161	30
220162	30
220163	30
220202	29
220203	29
220212	29
220213	29
220214	29
220215	29
220216	29
220222	29
220223	29
220224	29
220225	29
220226	29
220312	30
220313	30
220323	30
220602	31
220612	31
220622	31
220718	31
220719	31
220808	30
220809	30
220818	30
220819	30
220828	30
220829	30
221408	30
221409	30
221418	30
221419	30
221428	30
221429	30
222100	30
222110	30

PN	Page
222120	30
222161	30
222162	30
222163	30
222213	29
222233	29
222234	29
222235	29
222236	29
230100	30
230110	30
230120	30
230130	31
230140	31
230150	31
230161	30
230162	30
230163	30
230164	31
230165	31
230166	31
230201	29
230202	29
230203	29
230204	29
230205	29
230206	29
230211	29
230212	29
230213	29
230214	29
230215	29
230216	29
230221	29
230222	29
230223	29
230224	29
230225	29
230226	29
230227	29
230233	29
230234	29
230235	29
230236	29
230237	29
230243	29
230244	29
230245	29
230246	29
230247	29
230301	30
230302	30
230303	30
230311	30
230312	30
230313	30
230322	30
230323	30
230510	31

PN	Page	PN	Page	PN	Page	PN	Page	PN	Page
230520	31	242295	33	252266	33	270110	21	306148	38
230602	31	242296	33	252267	33	270111	21	306503	38
230612	31	242297	33	252274	33	270112	21	306602	38
230613	31	242715	33	252275	33	270113	21	306603	38
230622	31	242716	33	252276	33	270114	21	306606	38
230708	31	242717	33	252277	33	270201	22	306624	38
230709	31	242725	33	252284	33	270202	22	306648	38
230718	31	242726	33	252285	33	270203	23	306903	38
230719	31	242727	33	252286	33	270300	20	306906	38
230808	30	244233	33	252287	33	270301	20	306924	38
230809	30	244234	33	252294	33	270302	20	306948	38
230818	30	244235	33	252295	33	270305	20	307103	38
230819	30	244236	33	252296	33	270400	68	307106	38
230828	30	244244	33	252297	33	301103	38	307124	38
230829	30	244245	33	252715	33	301106	38	307148	38
231408	30	244246	33	252716	33	301124	38	307602	38
231409	30	244254	33	252717	33	301148	38	307603	38
231418	30	244255	33	252725	33	301503	38	307606	38
231419	30	244256	33	252726	33	301506	38	307624	38
231428	30	244265	33	252727	33	302103	38	307648	38
231429	30	244266	33	255101	47	302106	38	307903	38
231601	30	244275	33	260010	35	302124	38	307906	38
231611	30	244276	33	260012	35	302148	38	307924	38
231621	30	244285	33	260100	35	302603	38	307948	38
242130	34	244286	33	260200	35	302606	38	309000	27
242140	34	244295	33	260322	35	302624	38	309001	27
242150	34	244296	33	260325	35	302648	38	309002	27
242160	34	244725	33	260350	35	303103	38	309003	27
242170	34	244726	33	260381	35	303106	38	309025	27
242180	34	249101	19	260505	35	303124	38	309099	27
242190	34	249102	19	262245	34	303148	38	309101	27
242233	33	250101	47	262246	34	303602	38	309102	27
242234	33	252130	34	262255	34	303603	38	309103	27
242235	33	252140	34	262256	34	303606	38	309125	27
242236	33	252150	34	262265	34	303624	38	309199	27
242237	33	252160	34	262266	34	303648	38	309201	27
242243	33	252170	34	262275	34	304103	38	309202	27
242244	33	252180	34	262276	34	304106	38	309203	27
242245	33	252190	34	262285	34	304124	38	309225	27
242246	33	252233	33	262286	34	304148	38	309299	27
242247	33	252234	33	262295	34	304503	38	309302	27
242253	33	252235	33	262296	34	304506	38	309303	27
242254	33	252236	33	262715	34	304602	38	309325	27
242255	33	252237	33	262716	34	304603	38	310203	26
242256	33	252241	33	262725	34	304606	38	310225	26
242257	33	252243	33	262726	34	304624	38	310299	26
242264	33	252244	33	270000	20	304648	38	310303	26
242265	33	252245	33	270001	20	305103	38	310325	26
242266	33	252246	33	270002	20	305106	38	310399	26
242267	33	252247	33	270005	20	305124	38	310403	26
242274	33	252251	33	270010	20	305148	38	310425	26
242275	33	252253	33	270101	21	305602	38	310499	26
242276	33	252254	33	270103	21	305603	38	310503	26
242277	33	252255	33	270104	21	305606	38	310525	26
242284	33	252256	33	270105	21	305624	38	310599	26
242285	33	252257	33	270106	21	305648	38	310603	26
242286	33	252261	33	270107	21	306103	38	310625	26
242287	33	252264	33	270108	21	306106	38	310699	26
242294	33	252265	33	270109	21	306124	38	311203	26

PN	Page
311225	26
311299	26
311303	26
311325	26
311399	26
311403	26
311425	26
311499	26
311503	26
311525	26
311599	26
311603	26
311625	26
311699	26
312203	26
312225	26
312299	26
312303	26
312325	26
312399	26
312403	26
312425	26
312499	26
312503	26
312525	26
312599	26
312603	26
312625	26
312699	26
313203	26
313225	26
313299	26
314203	26
314225	26
314299	26
314303	26
314325	26
314399	26
315203	26
315225	26
315299	26
315303	26
315325	26
315399	26
316803	28
316825	28
316899	28
316903	28
316925	28
316999	28
317803	28
317825	28
317899	28
317903	28
317925	28
317999	28
318803	26
318825	26
318899	26

PN	Page
318903	26
318925	26
318999	26
319803	26
319825	26
319899	26
319903	26
319925	26
319999	26
320000	27
320003	27
320025	27
320101	47
320103	27
320125	27
320203	27
320225	27
320303	27
320325	27
320803	28
320825	28
320899	28
320903	28
320925	28
320999	28
321303	26
321325	26
321403	26
321425	26
321503	26
321525	26
321603	26
321625	26
321703	26
321725	26
326103	39
326106	39
326124	39
326148	39
326202	39
326603	39
326606	39
326624	39
326648	39
326899	28
326903	39
326906	39
326924	39
327103	39
327106	39
327124	39
327148	39
327202	39
327603	39
327606	39
327624	39
327648	39
327899	28
327903	39

PN	Page
327906	39
327924	39
330101	47
331066	40
336066	40
336899	28
337066	40
337899	28
339066	40
341010	40
343010	40
346010	40
347010	40
356803	28
356825	28
357803	28
357825	28
400000	45
401122	45
401182	45
401251	45
401252	45
401255	45
401312	45
401372	45
401375	45
401432	45
401502	45
401622	45
401752	45
401892	45
401912	45
401932	45
402252	45
402312	45
402372	45
402502	45
402622	45
402752	45
402892	45
403182	45
403252	45
403312	45
403372	45
403502	45
403562	45
403622	45
403752	45
403872	45
403892	45
403902	45
404152	45
404172	45
404202	45
404252	45
404302	45
404352	45
452251	46
452381	46

PN	Page
452385	46
452501	46
452505	46
452751	46
452755	46
452900	46
452905	46
453382	46
453386	46
453502	46
453506	46
453752	46
453756	46
453901	46
453906	46
520090	60
520097	60
520194	60
520906	60
521004	60
521142	60
521157	60
521158	60
521164	60
522112	61
522122	61
522129	61
529095	61
529102	61
529300	60
529337	61
529338	61
529340	60
529341	60
529355	61
529361	61
529362	61
529368	61
529370	61
529385	61
529386	61
529405	62
531025	62
531050	62
531075	62
532025	62
532050	62
533050	62
700103	34
700115	35
702007	50
702008	50
702027	54
702030	51
702031	51
702032	51
702033	51
703005	50
703006	50

PN	Page
703007	50
703010	52
703015	53
703023	54
703024	54
703030	52
703035	53
703040	52
703041	53
703042	53
703050	52
703060	54
703072	56
703073	56
703075	51
703079	57
703112	53
710010	55
710020	55
710030	55
710040	55
711000	55
750000	46
760375	46
760500	46
764998	46
765000	46
765002	46
765004	46
765006	46
765010	46
765012	46
ANCLAMP	68
ANCLUG	68
ANCNMEA	68
ANCSHRINK	68
ANCTERM	68
ANCWIRE	68
DR1218	67
DR2218	67
DR2230	66
DR2243	66
DR2425	67
P33406	47
P33407	47
P33412	47
SPC103	18
SPK1614	28
SPK2218	28
SPKKIT	28

Ingress Protection (IP) Ratings Guide




Example:

An IP65 rating can be determined using the adjacent table and example:

- The first number of the rating example, 6, in the gray column means the enclosure is dust tight
- The second number of the rating example, 5, in the blue column means the enclosure is protected against jets of water

The IP rating system was established by the International Electrotechnical Commission (IEC), an organization for international standards and conformity assessment. The IEC collaborates closely with the International Organization for Standardization (ISO). A complete description of the IP ratings and associated tests is found in IEC Publication 529. Although these ratings were initially developed as a way to classify enclosures, they now provide a convenient, practical way to compare levels of sealing. Many electrical products have an Ingress Protection (IP) rating which identifies the environmental factors needing consideration prior to the product's installation.

This is important when deciding when to mount products in a dry and clean environment versus a wet and/or dusty environment. The IP rating indicates the degree of protection provided. The numbers following IP represent levels of sealing and can range from no protection to full protection against dust and water. The table provides a description of the protection at each level.

SOLIDS		WATER	
1	 Protected against a solid object greater than 50 mm such as a hand.	1	 Protected against vertically falling drops of water. Limited ingress permitted.
2	 Protected against a solid object greater than 12 mm such as a finger.	2	 Protected against vertically falling drops of water with enclosure tilted up to 15 degrees from the vertical. Limited ingress permitted.
3	 Protected against a solid object greater than 2.5 mm such as a screwdriver.	3	 Protected against sprays of water up to 60 degrees from the vertical. Limited ingress permitted for three minutes.
4	 Protected against a solid object greater than 1 mm such as a wire.	4	 Protected against water splashed from all directions. Limited ingress permitted.
5	 Dust Protected. Limited ingress of dust permitted. Will not interfere with operation of the equipment. Two to eight hours.	5	 Protected against jets of water. Limited ingress permitted.
6	 Dust tight. No Ingress of dust. Two to eight hours.	6	 Water from heavy seas or water projected in powerful jets shall not enter the enclosure in harmful quantities.
		7	 Protection against the effects of immersion in water between 15 cm and 1 m for 30 minutes.
		8	 Protection against the effects of immersion in water under pressure for long periods.

Rating Example:

IP65
INGRESS PROTECTION

Ancor

N85 W12545 Westbrook Crossing
Menomonee Falls, WI 53051 USA
p 800.307.6702
f 800.799.3779

New Zealand

42 Apollo Drive
Rosedale, Auckland 0632
New Zealand
p +64.9.415.7261
f +64.9.415.9327

The Netherlands

Snijdersbergweg 93
1105 AN Amsterdam
The Netherlands
p +31(0)20 34 22 100
f +31(0)20 69 71 006

techsupport@marinco.com
ancorproducts.com

©2022 Ancor
All rights reserved

Unauthorized copying or
reproduction is a violation
of applicable laws.



ANC_CAT_003_0821